

H Lux[®]

LIGHTING LED



POOL LIGHTING
Catalogue

Controller for Underwater Light

2.Controller 02-06



WM Wall-Mount

3.WM Series 07-16



WR Wall-Mount & Recessed

4.WR Series 17-18



RC Recessed

5.RC Series 19-24



6. RV Series 24-28



GR—General

7.GR Series 29-30



FC—Fiberglass & Concrete

8.FC Series 31-34



FG—Fiberglass

9.FG Series 35-38



PE—Casing Pipe

10.PE Series 39-40



SL & FL Spotlight & Fountain Light

12.SL & FL Series 43-46



Underground Light
13.UG Series 47



Swimming Pool Equipment Accessories

14.Accessories 48-50



SS—Stainless Steel
PC—Polycarbonate

Models are named with S/H based on LED brands.

HJ-0040 WiFi Controller

HJ-0040 is a high-performance WiFi & Bluetooth smart internal control box with a waterproof rating of IP67. Equipped with a special hanging plate, it is easy to install. Users can switch between 7 static light colors and 9 light changing modes at will, and can also adjust the light mode, brightness and speed. Equipped with a full touch screen remote control handle, it can achieve wireless remote control.

Remote intelligent control can be achieved by connecting to WiFi with the mobile device App developed by our company. In the absence of network, short-range intelligent control can be achieved through Bluetooth. You can download the App through App Store or scan the QR code.

HJ-0040 Parameters

Input Voltage: AC 110-250V

Output Voltage: AC 110-250V

Rated Power: 600W

Control Way: Screen touch remote & mobile App

IP Rating: IP67

Operation Platform: Support WiFi & Bluetooth connection in Android, iOS and Harmony systems


2.4GHz Wireless transmission

Screen Touch Remote: built-in antenna for remote control distance of 30m in open areas


Receiver Size: 152*188*63mm

Receiver Material: PC with tempered glass screen touch panel

Remote control via mobile App

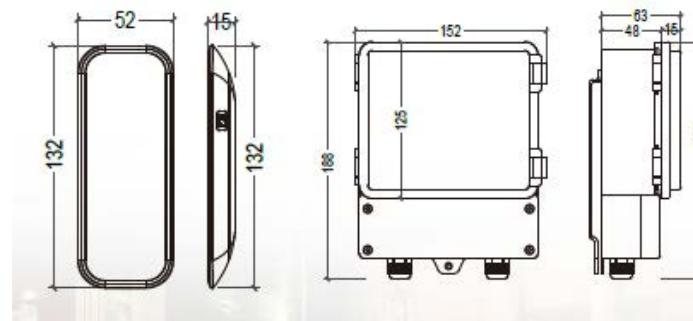

HJ-0040 Wiring Diagram

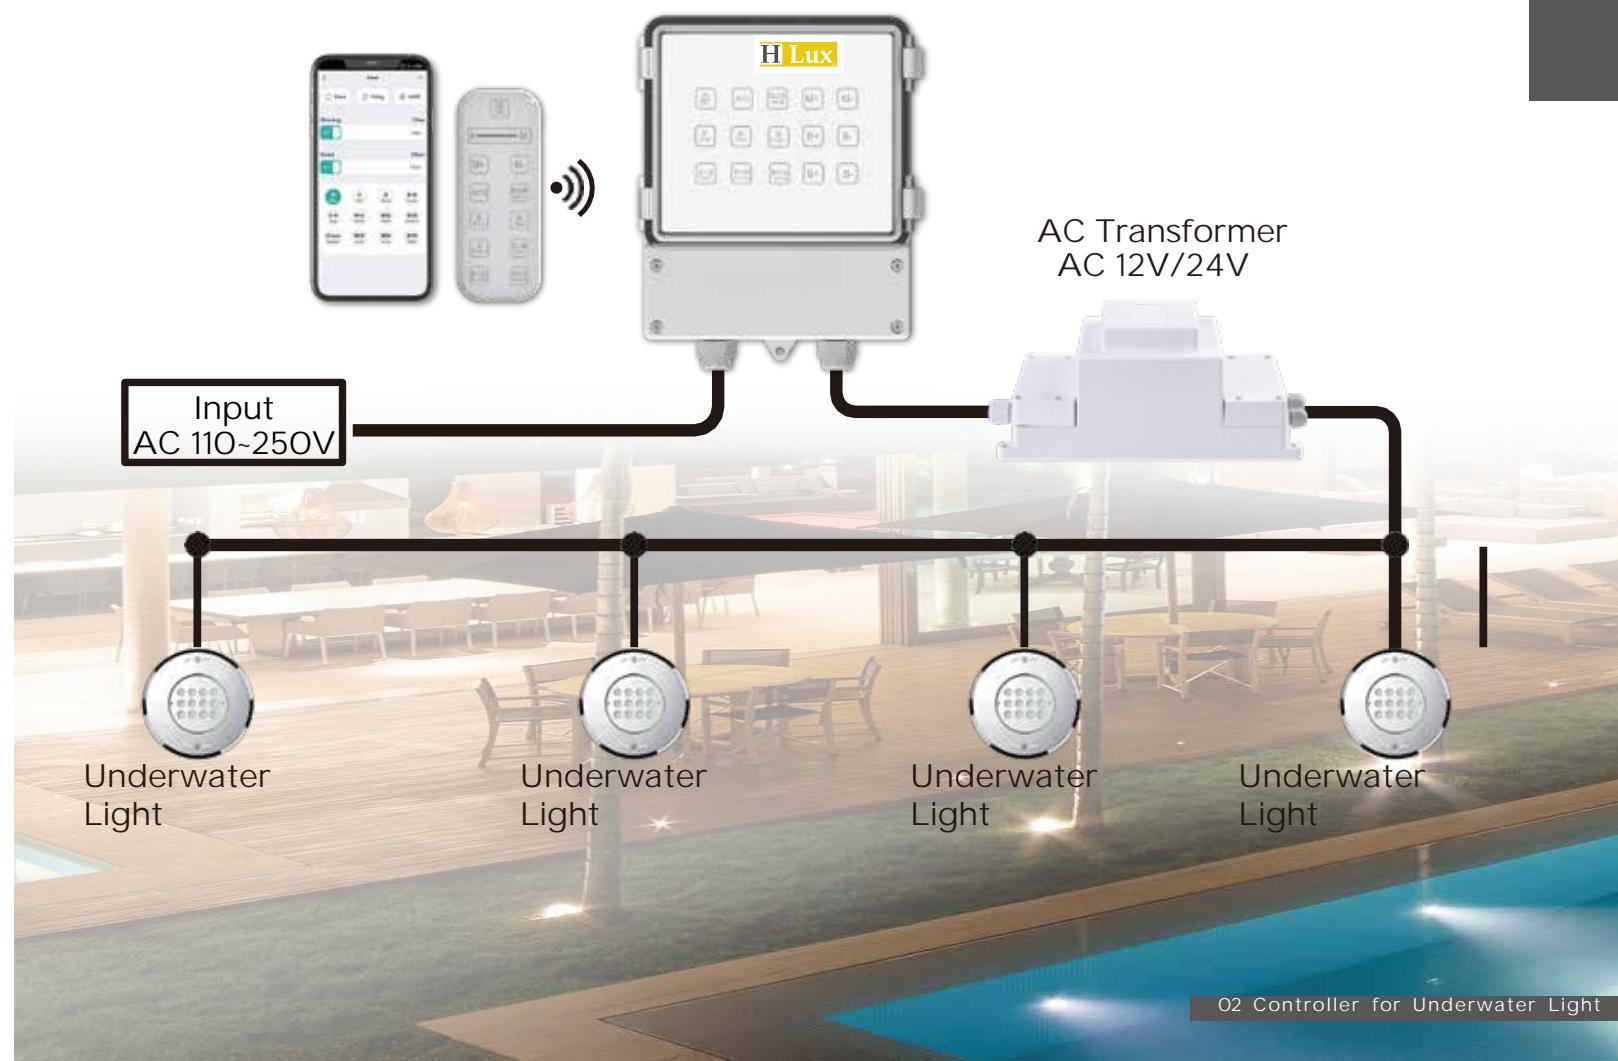


HJ-0041 Synchronized Switch Controller


HJ-0041 is an internal RGB synchronous control box with simple design, convenient installation, light weight and beautiful appearance. Users can arbitrarily switch between 7 static light colors and 9 light changing modes, and use the 18-key remote control handle to achieve wireless remote control in a 30m open area.

HJ-0041 Parameters

| |
|--|
| Input Voltage : AC 110-250V |
| Output Voltage : AC 110-250V |
| Rated Power : 600W |
| Control Way: Remote control handle |
| Remote Emission Frequency : 315MHz |
| Receiver Size : 134*89*37mm |
| Receiver Material: High quality PC with silicone buttons |
| 7 static light colors and 7 light changing modes to switch at will. |
| Built-in antenna for 30m wireless remote control range in open areas |

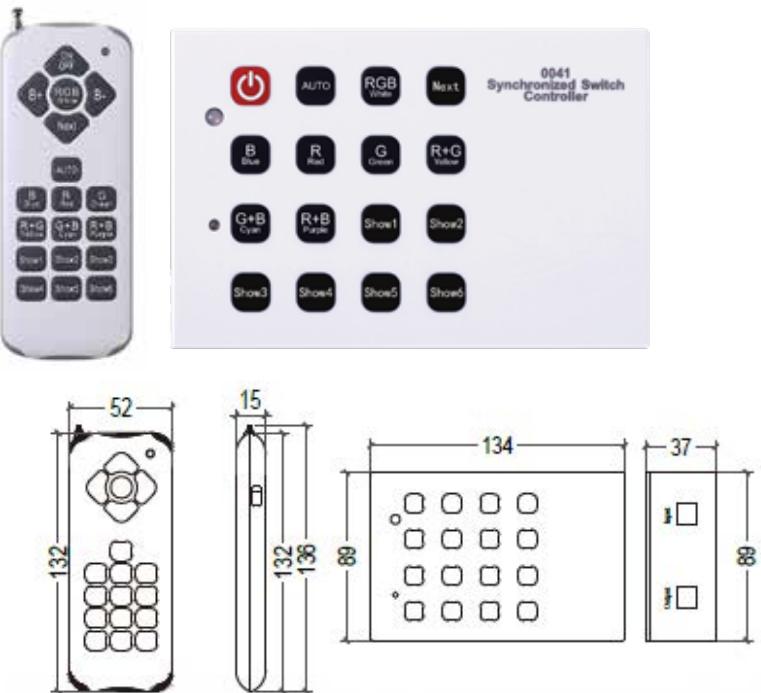

HJ-0041 Wiring Diagram

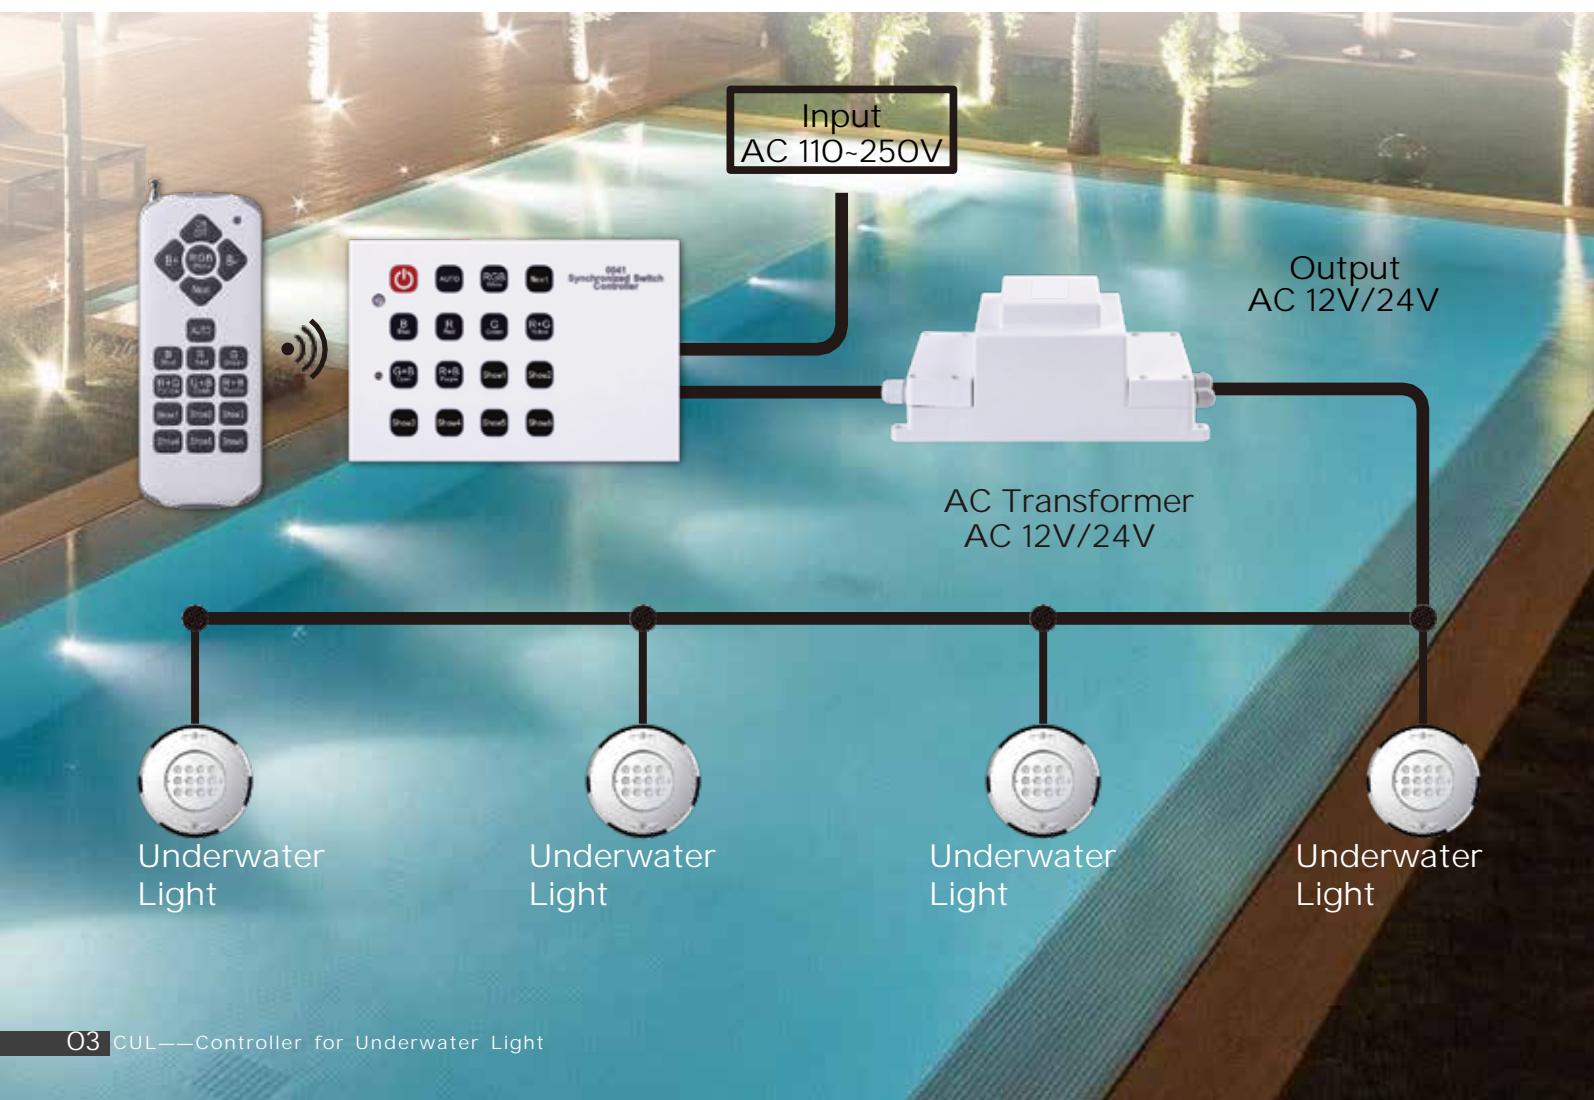

HJ-0020 WiFi Controller


With a waterproof rating of IP67, HJ-0020 is a WiFi & Bluetooth synchronous control box, which is compatible with lighting fixture that is controlled by switch modes of other brands. It is equipped with a special hanging plate for easy installation. Users can switch between 7 static light colors and 9 light changing modes at will. It is equipped with a 13-key full touch screen remote control handle to achieve wireless remote control. Remote intelligent control can be achieved by connecting to WiFi with the mobile device App developed by our company. In the absence of network, short-range intelligent control can be achieved through Bluetooth. You can download the App through App Store or scan the QR code.

HJ-0020 Parameters


| |
|--|
| Input Voltage: AC 12V |
| Output Voltage: AC 12V |
| Rated Power: 200W |
| Control Way: Screen touch remote & mobile App |
| Waterproof Rating: IP67 |
| Operation Platform: Support WiFi & Bluetooth connection in Android,iOS and Harmony systems |
| 2.4 GHz Wireless transmission |
| Screen Touch Remote: built-in antenna for remote control distance of 30m in open areas |
| Receiver Size: 152*188*63mm |
| Receiver Material: PC with tempered glass screen |
| touch panel Remote control via mobile App |

DIRECT

Bluetooth

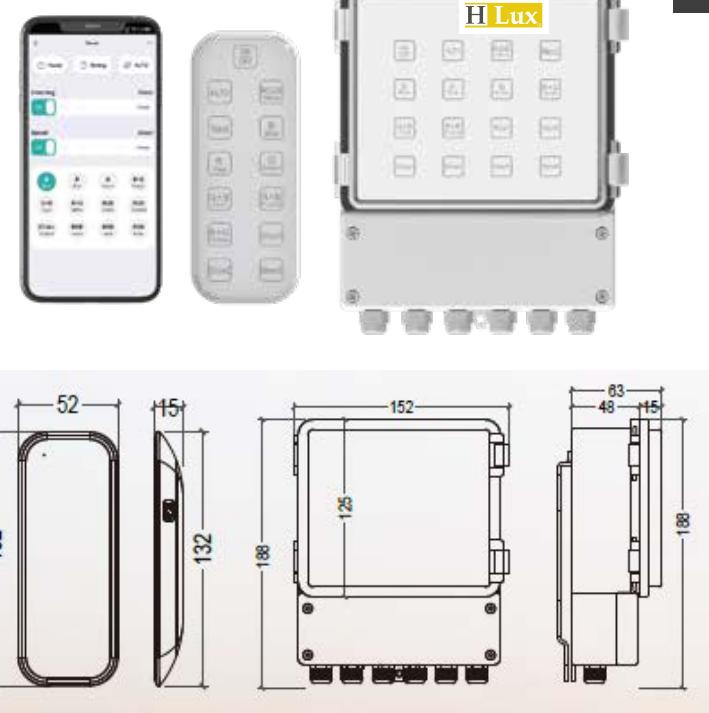

HJ-0020 Wiring Diagram

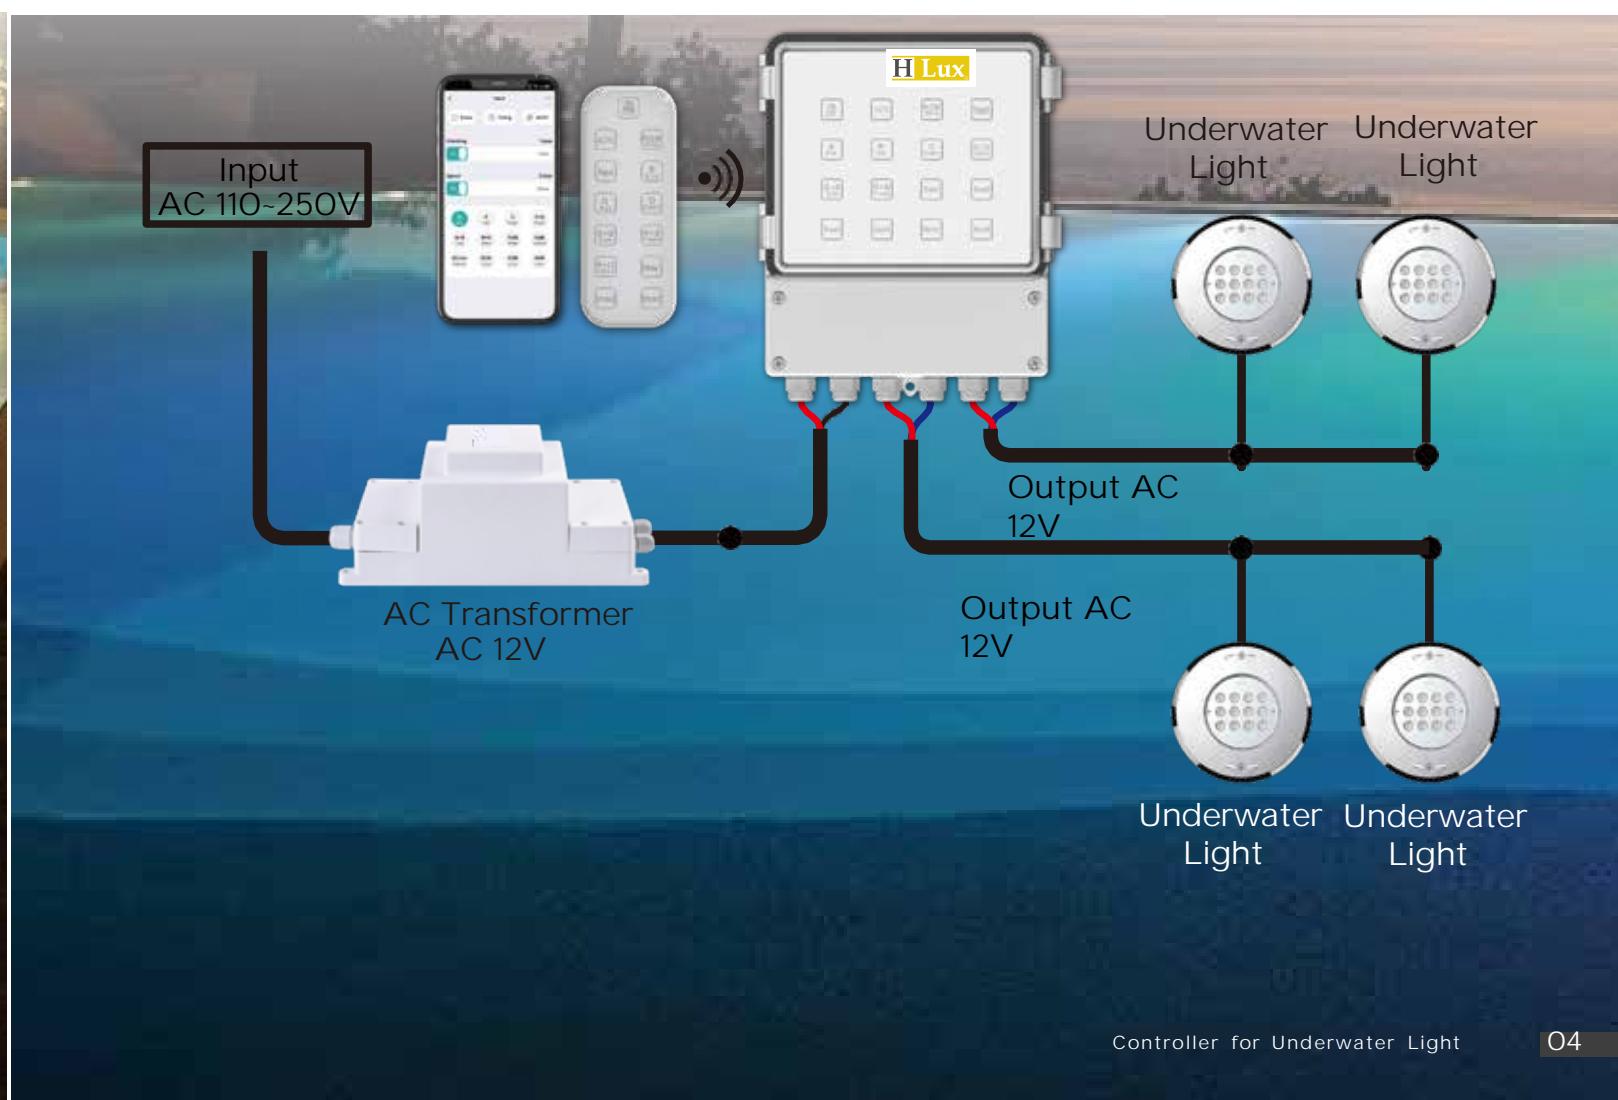


HJ-0050 WiFi External Control Controller

HJ-0050 is a high-performance WiFi & Bluetooth smart external control box that can control RGB (4-wire)/RGBW (5-wire) lights. It is equipped with a special hanging plate for easy installation. The full touch screen control panel and handle are designed with a color ring section. Users can control the color ring to select the desired light color, switch between 7 static light colors and 9 light changing modes at will, and also adjust modes of brightness, speed and pause and jump changing. It is equipped with a full touch screen remote control handle to achieve wireless remote control. Remote intelligent control can be achieved by connecting to WiFi with the mobile device App developed by our company. In the absence of network, short-range intelligent control can be achieved through Bluetooth. You can download the App through App Store or scan the QR code.

HJ-0050 Parameters

| |
|---|
| Working Voltage:DC 12V/24V |
| Work with RGB(4-wire)/RGBW(5-wire) lights |
| Maximum Load Power : 216W/432W (12V/24V) |
| Control Way: Screen touch remote & mobile App |
| Waterproof Rating: IP67 |
| Operation Platform: Support WiFi & Bluetooth connection in Android, iOS and Harmony systems |
| 2.4GHz Wireless transmission |
| Screen Touch Remote: built-in antenna for remote control distance of 30m in open areas |
| Receiver Size: 152*188*63mm |
| Receiver Material: PC with tempered glass screen touch panel |
| Remote control via mobile App |
| Can receive signal of international DMX512 |

HJ-0050 Wiring Diagram

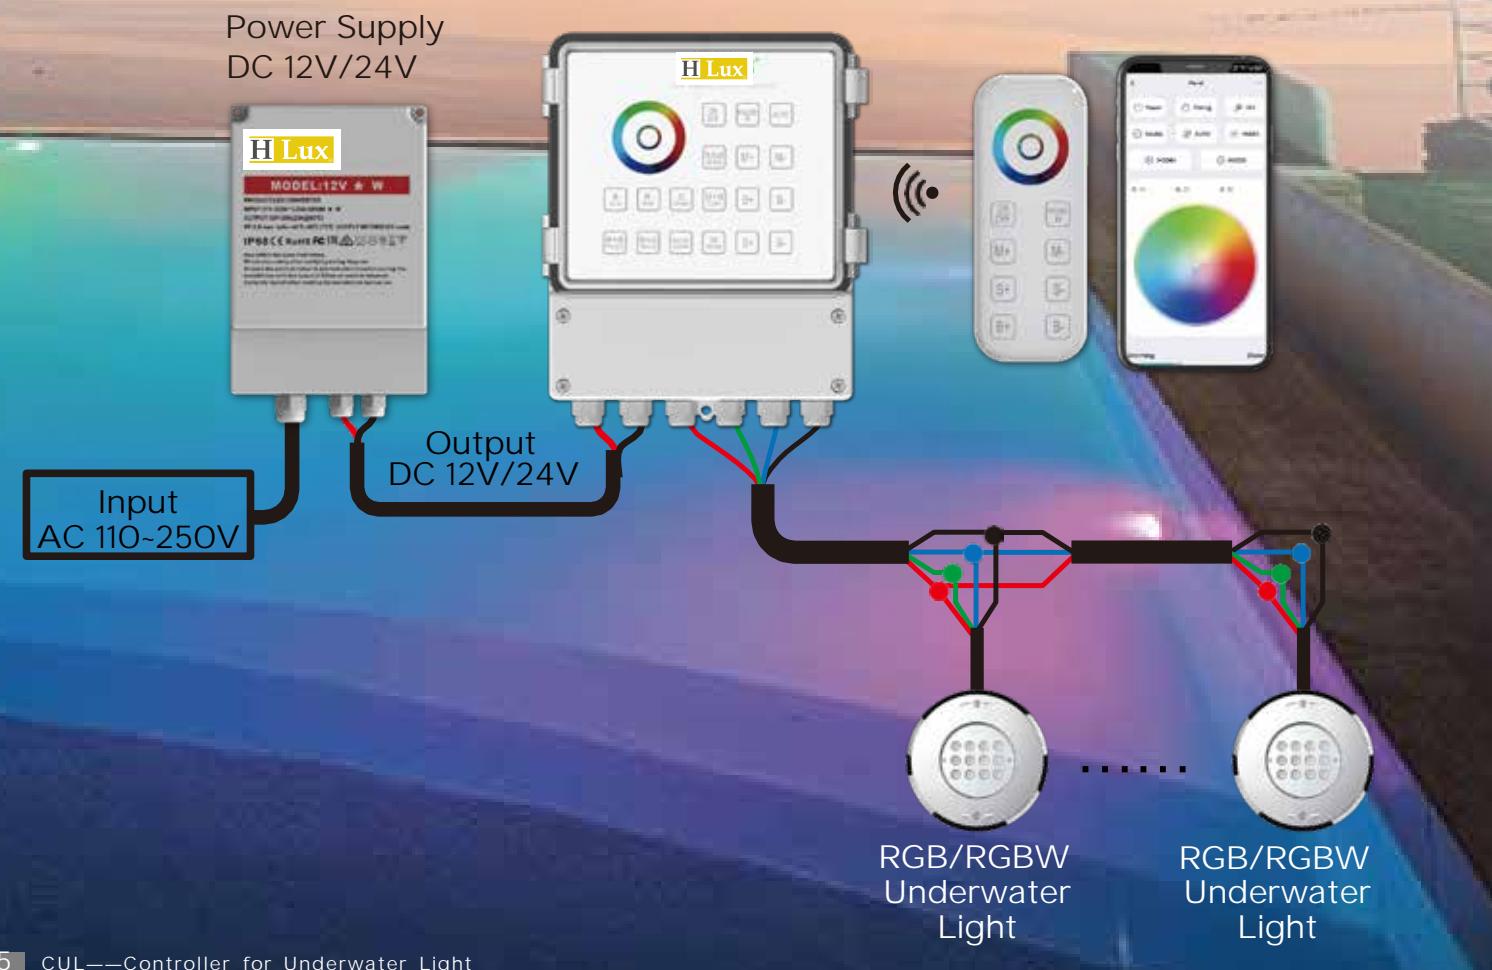

HJ-0010 Single Remote

HJ-0010 is a single remote control with internal control of RGB underwater lights. It has a simple and clear 18-key design. You can select the desired light color and mode with one click, and switch between 7 static light colors and 9 light changing modes, 10 levels of speed and brightness at will. It can achieve wireless remote control of 30 meters in open areas. It is suitable for small family or commercial swimming pools, and can be used for single/multi (≤4) underwater lights.



HJ-0010 Parameters

| |
|--|
| Battery : 23A 12V |
| Working Current : < 30mA |
| Remote Emission Frequency : 315MHz |
| RF Remote Output Power : 3mW |
| Remote Handle Size : 132*52*15mm |
| Wireless Remote Control Distance: Built-in Antenna for 30m in open areas |

HJ-O-10V Dimmer


HJ-O-10V single dimmer supports dimming curve selection function. The dimming depth can achieve the dimming limit of 0.1-100%. The LED dimming starts from 0.1% to meet the diverse requirements for light intensity. The dimming process is smooth and flicker-free, making it more comfortable for the eyes. Using advanced digital circuit design and built-in high-performance MCU, it supports deep flicker-free dimming and is compatible with external control systems of different brands on the market. It complies with the safety extra-low voltage label, and has protection of short circuit, over-temperature, overload and over-voltage.



Dimmer Panel Parameters

| |
|--------------------------------------|
| Input Voltage: AC 100~240V , 50-60Hz |
| Output Voltage: DC 0-10V |
| Working Temperature: -10°C-55°C |
| Output Power : 0-10V ≤15mA |
| Dimmer Panel Size : 87*87*34mm |

HJ-O-10V Wiring Diagram

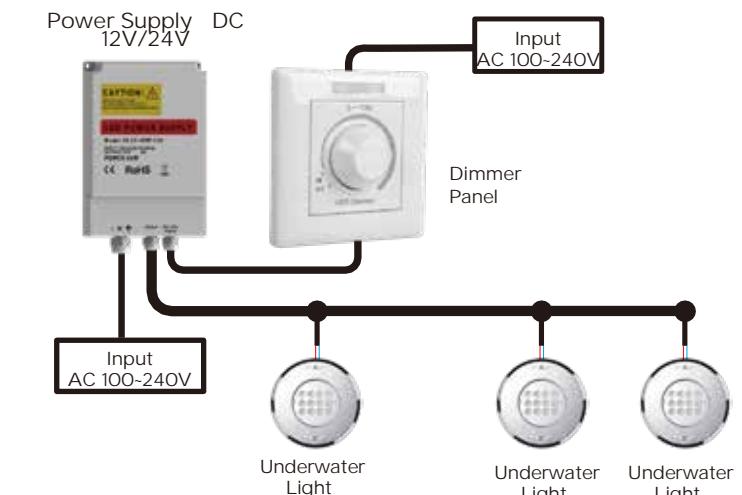

LED Underwater Light Luminous Intensity Distribution

Luminous Intensity Distribution
CREE/OSRAM with Light Source of 45°Beam Angle

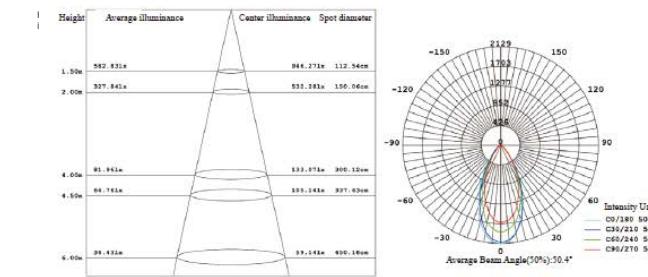


Figure 1
Average and
Center E Figure

Figure 2
Indoor Luminous
Intensity
Distribution

Luminous Intensity Distribution
SMD Epistar with Light Source of 120°Beam Angle

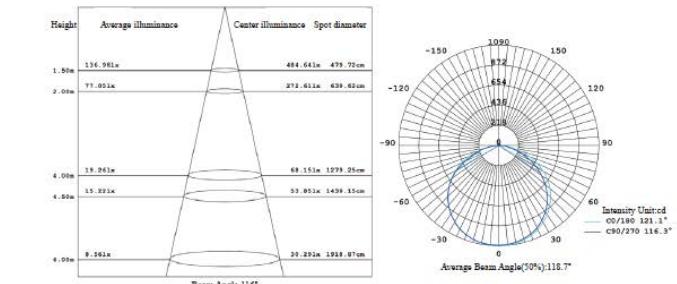


Figure 3
Average and
Center E Figure

Figure 4
Indoor Luminous
Intensity
Distribution

Optional Colors for LED Underwater Light

Warm White

2800~3000K

Cool White

6000~6500K

Natural White

4000~4500K


Blue

$\lambda:465-467nm$

Lake Blue



$\lambda:475-485nm$

Optional Beam Angles for LED Underwater Light

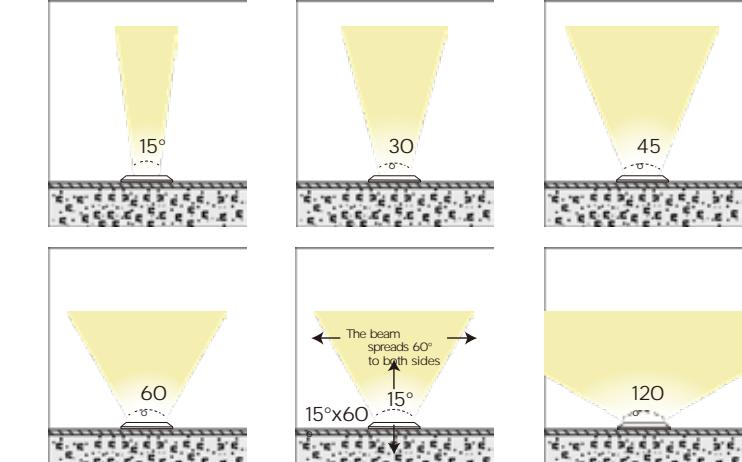



HJ-WM-PC166



HJ-WM-SS168



| Model | Power | Voltage | CW/W W | RGB | RGBW | Controller | Basic Parameters | Product Features |
|-------------|-------|--------------------|--------|-----|------|---|--|-------------------------------|
| HJ-WM-PC166 | 6W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/ HJ-0041 HJ-0010 HJ-0-10V | Waterproof Rating: IP 68 Lens Material: PC with anti-glare design Beam Angle: 120° | Body Material: ABS+UV |
| | 12W | | ✓ | ✓ | X | | | |
| HJ-WM-SS168 | 6W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/ HJ-0041 HJ-0010 HJ-0-10V | Working Temperature: -20°C~48°C Application for Concrete Pool/Sauna | Body Materials: SS304/316L |
| | 12W | | ✓ | ✓ | X | | | |



HJ-WM-PC225



HJ-WM-PC238



| Model | Power | Voltage | CW/W W | RGB | RGBW | Controller | Basic Parameters |
|-------------|-------|--------------------|--------|-----|------|--|--|
| HJ-WM-PC225 | 12W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V | Waterproof Rating: IP 68 Lens Material: PC with anti-glare design |
| | 18W | | ✓ | ✓ | X | | |
| HJ-WM-PC238 | 25W | 12V/24V (AC/DC) | ✓ | ✓ | X | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V | Body Material: ABS+UV |
| | | | | | | | |


Model: HJ-WM-PC295S HJ-WM-PC295H
HJ-WM-PC295SV HJ-WM-PC295HV (Models are named with S/H based on LED brands)



HJ-WM-PC295S



HJ-WM-PC295H



HJ-WM-PC295H

HJ-WM-PC295S HJ-WM-PC295H



HJ-WM-PC295SV HJ-WM-PC295HV



HJ-WM-PC295HV



| Model | Power | Voltage | CW/W W | RGB | RGBW | Controller | Basic Parameters | Product Features |
|--------------|-------|--------------------|--------|-----|------|--|--|------------------|
| HJ-WM-SS23OS | 7W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V | Waterproof Rating: IP 68 Body Materials: SS304/316L Lens Material: PC Ring Color: Blue / White | Beam Angle: 120° |
| | 12W | | ✓ | ✓ | X | | | |
| | 18W | | ✓ | ✓ | X | | | |
| HJ-WM-SS23OH | 9W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V | Beam Angle: 45° | |
| | 12W | | ✓ | ✓ | X | | | |
| | 18W | | ✓ | ✓ | X | | | |



HJ-WM-SS300S

HJ-WM-SS300H

| Model | Power | Voltage | CW/W W | RGB W | Controller | Basic Parameters | Product Features |
|--------------|-------|--------------------|-----------|----------|------------|--|------------------|
| HJ-WM-SS230S | 12W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | Waterproof Rating: IP 68 Body materials: SS304/316L Lens materials: PC Ring Color: Blue/White | Beam Angle: 120° |
| | 18W | | ✓ | ✓ | X | | |
| | 25W | | ✓ | ✓ | X | | |
| | 35W | | ✓ | ✓ | ✓ | | Beam Angle: 45° |
| HJ-WM-SS230H | 12W | | ✓ | ✓ | X | | |
| | 18W | | ✓ | ✓ | X | | |
| | 25W | | ✓ | ✓ | X | | |
| | 35W | | ✓ | ✓ | X | | |



HJ-WM-SS152

HJ-WM-SS218

| Model | Power | Voltage | CW/W W | RGB W | Controller | Basic Parameters |
|-------------|-------|----------------|-----------|----------|------------|---|
| HJ-WM-SS152 | 12W | 12V (AC/DC) | ✓ | ✓ | ✓ | Waterproof Rating: IP 68 Body materials: SS304/316L Resin filled Lens Material:PC Beam Angle:120° Waterproof Craft |
| | 18W | | ✓ | ✓ | X | |
| HJ-WM-SS218 | 12W | 12V (AC/DC) | ✓ | ✓ | ✓ | Waterproof Rating: IP 68 Body materials: SS304/316L Resin filled Lens Material:PC Beam Angle:120° Waterproof Craft |
| | 25W | | ✓ | ✓ | X | |



HJ-WM-SS102

HJ-WM-SS105

| Model | Power | Voltage | CW/W W | RGB W | Controller | Basic Parameters | Product Features |
|-------------|-------|----------------|-----------|----------|------------|--|---|
| HJ-WM-SS102 | 5W | 12V (AC/DC) | ✓ | ✓ | X | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-O-10V | Waterproof Rating Ip 68 Body materials: SS304/316L Waterproof Craft: Resin filled Beam Angle: 120° |
| | | | | | | | |
| HJ-WM-SS105 | 9W | 12V (DC) | ✓ | ✓ | X | HJ-0050 HJ-O-10V | Lens Material:/ |
| | | | | | | | |




HJ-WM-SS180S

HJ-WM-SS180H

| Model | Power | Voltage | CW/W W | RGB W | Controller | Basic Parameters | Product Features |
|--------------|-------|--------------------|-----------|----------|------------|--|--|
| HJ-WM-SS180S | 9W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-O-10V | Waterproof Rating Ip 68 Body materials: SS304/316L Lens Material: PC Waterproof Craft: Resin filled |
| | 18W | | ✓ | ✓ | X | | |
| HJ-WM-SS180H | 9W | 12V/24V (AC/DC) | ✓ | ✓ | X | | Beam Angle: 120° |
| | 18W | | ✓ | ✓ | X | | |

Model: HJ-WM-SS220/HJ-WM-PC220

WM Series

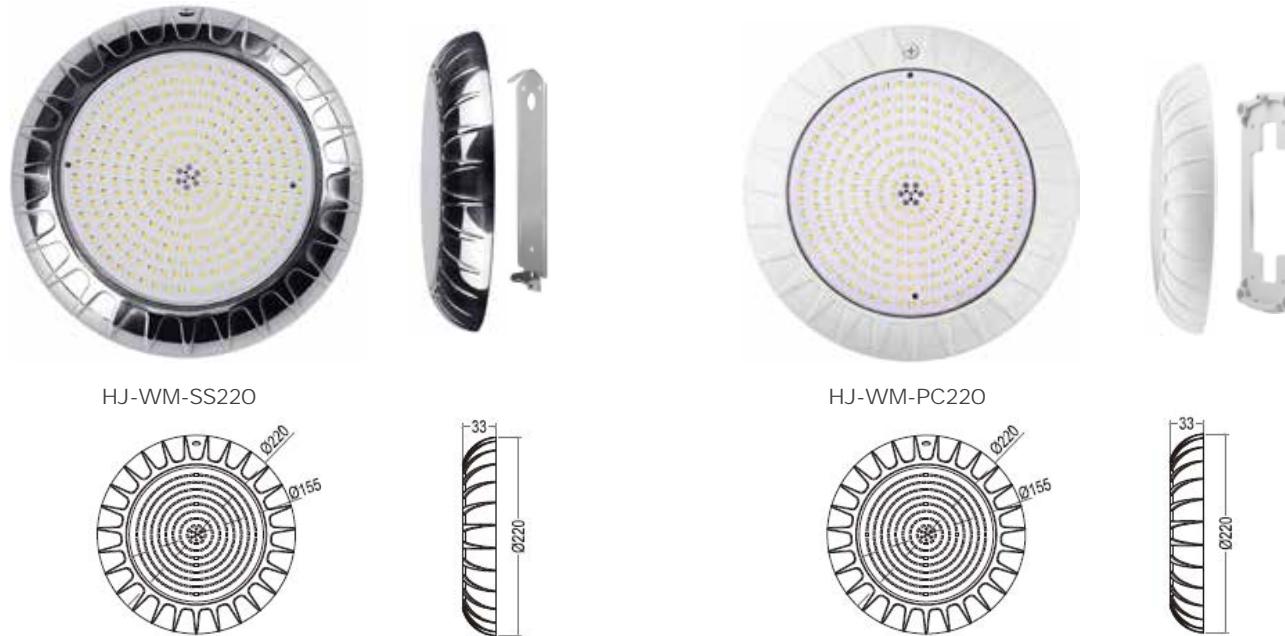

| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|-------------|-------|--------------------|-------|-----|------|-----------------|--|----------------------------|
| HJ-WM-SS220 | 12W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 | Waterproof Rating: IP 68 Lens Material: PC | Body Materials: SS304/316L |
| | 18W | | ✓ | ✓ | X | HJ-0040/HJ-0041 | | |
| | 25W | | ✓ | ✓ | X | HJ-0050 | | |
| | 12W | | ✓ | ✓ | ✓ | HJ-0010 | Beam Angle: 120° Waterproof Craft: Resin filled | Body Materials: ABS+UV |
| HJ-WM-PC220 | 18W | | ✓ | ✓ | X | HJ-0-10V | | |
| | 25W | | ✓ | ✓ | X | | | |

Model: HJ-WM-SS269

WM Series



| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|-------------|-------|--------------------|-------|-----|------|-----------------|---|
| HJ-WM-SS269 | 18W | 12V/24V (AC/DC) | ✓ | ✓ | X | HJ-0020 | Waterproof Rating: IP 68 Body Materials: SS304/316L Lens Material: PC |
| | 25W | | ✓ | ✓ | X | HJ-0040/HJ-0041 | |
| | 35W | | ✓ | ✓ | X | HJ-0050 | |

Model: HJ-WM-SS228/HJ-WM-SS298



| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|-------------|-------|--------------------|-------|-----|------|-----------------|--|
| HJ-WM-SS228 | 12W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 | Waterproof Rating: IP 68 Body Material: SS304/316L Lens Material: PC |
| | 18W | | ✓ | ✓ | X | HJ-0040/HJ-0041 | |
| | 18W | | ✓ | ✓ | ✓ | HJ-0050 | |
| | 25W | | ✓ | ✓ | X | HJ-0010 | |
| HJ-WM-SS298 | 35W | | ✓ | ✓ | X | HJ-0-10V | |

Model: HJ-WM-SS280/HJ-WM-SS280FGV



| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|-------------|-------|--------------------|-------|-----|------|-----------------|---|
| HJ-WM-SS280 | 12W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 | Waterproof Rating: IP 68 Body Materials: SS304/316L Lens Material: PC |
| | 18W | | ✓ | ✓ | X | HJ-0040/HJ-0041 | |
| | 25W | | ✓ | ✓ | X | HJ-0050 | |
| | 35W | | ✓ | ✓ | X | HJ-0010 | |

Model: HJ-WM-PC200
HJ-WM-PC200V HJ-WM-PC200FGV



| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|---|-------|--------------------|-------|-----|------|--|---|
| HJ-WM-PC200 HJ-WM-PC200V HJ-WM-PC200FGV | 12W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 | Waterproof Rating: IP 68 Body Materials: ABS+UV Lens Material: PC Waterproof Craft: Resin filled Beam Angle: 120° |
| | 18W | | ✓ | ✓ | ✗ | HJ-0-10V | |

Model: HJ-WM-PC270 HJ-WM-PC270FGV
HJ-WM-PC270V HJ-WM-PC270FGV



| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|---|-------|--------------------|-------|-----|------|--|---|
| HJ-WM-PC270 HJ-WM-PC270V HJ-WM-PC270FGV | 12W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V | Waterproof Rating: IP 68 Body Materials: ABS+UV Lens Material: PC Waterproof Craft: Resin filled Beam Angle: 120° |
| | 18W | | ✓ | ✓ | ✗ | | |
| | 25W | | ✓ | ✓ | ✗ | | |
| | 35W | | ✓ | ✓ | ✗ | | |



| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|---|-------|--------------------|-------|-----|------|--|---|
| HJ-WM-PC242 HJ-WM-PC242V HJ-WM-PC242FGV | 12W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V | Waterproof Rating: IP 68 Body Materials: ABS+UV Lens Material: PC Waterproof Craft: Resin filled Beam Angle: 120° |
| | 18W | | ✓ | ✓ | ✗ | | |
| | 25W | | ✓ | ✓ | ✗ | | |
| | 35W | | ✓ | ✓ | ✗ | | |
| | | | | | | | |


| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|---|-------|--------------------|-------|-----|------|--|---|
| HJ-WM-PC290 HJ-WM-PC290V HJ-WM-PC290FGV | 12W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V | Waterproof Rating: IP 68 Body Materials: ABS+UV Lens Material: PC Waterproof Craft: Resin filled Beam Angle: 120° |
| | 18W | | ✓ | ✓ | ✗ | | |
| | 25W | | ✓ | ✓ | ✗ | | |
| | 35W | | ✓ | ✓ | ✗ | | |
| | | | | | | | |

Model: HJ-WM-SS200 HJ-WM-SS200FGV
HJ-WM-SS200V



| Model | Power | Voltage | Controller | | Basic Parameters | | | |
|---|-------|-----------------|------------|-----|------------------|--|--|---|
| | | | CW/WW | RGB | RGBW | | | |
| HJ-WM-SS200 HJ-WM-SS200V HJ-WM-SS200FGV | 12W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V | Waterproof Rating: IP 68 Resin filled | Waterproof Craft: Body Materials: SS304/316L Beam Angle: 120° Lens Material: PC |
| | 18W | | ✓ | ✓ | X | | | |

Model: HJ-WM-SS290 HJ-WM-SS290FGV
HJ-WM-SS290V HJ-WM-SS290FGV

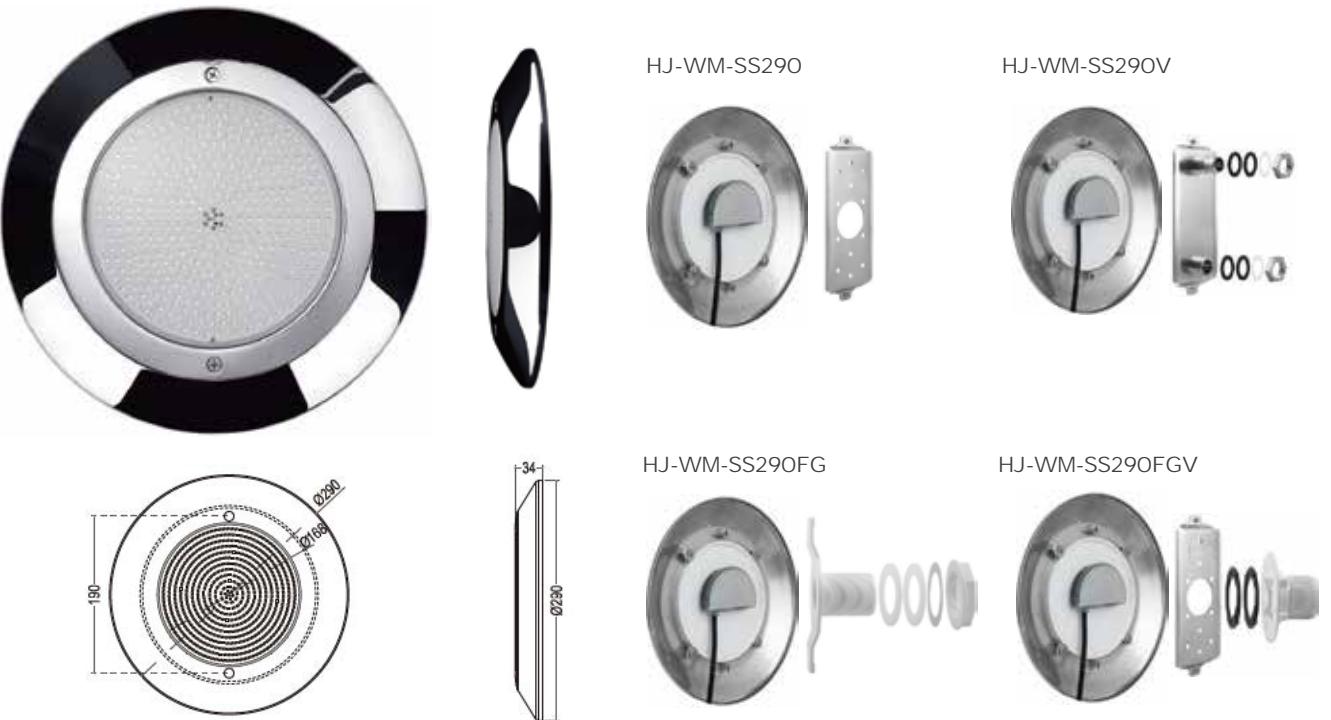


| Model | Power | Voltage | Controller | | Basic Parameters | | | |
|-------------|-------|-----------------|------------|-----|------------------|---------------------|----------------------------|--------------------------------|
| | | | CW/WW | RGB | RGBW | | | |
| HJ-WM-SS290 | 12W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 | Waterproof Rating: IP 68 | Beam Angle: 120° |
| | 18W | | ✓ | ✓ | X | HJ-0040/HJ-0041 | Body Materials: SS304/316L | Waterproof Craft: Resin filled |
| | 25W | | ✓ | ✓ | X | HJ-0050 | Lens Material: PC | |
| | 35W | | ✓ | ✓ | X | HJ-0010 HJ-0-10V | | |

Model: HJ-WM-SS270 HJ-WM-SS270V HJ-WM-SS270FG HJ-WM-SS270FGV




| Model | Power | Voltage | Controller | | Basic Parameters | | | |
|-------------|-------|-----------------|------------|-----|------------------|---------------------|----------------------------|--------------------------------|
| | | | CW/W | RGB | RGBW | | | |
| HJ-WM-SS270 | 12W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 | Waterproof Rating: IP 68 | Beam Angle: 120° |
| | 18W | | ✓ | ✓ | X | HJ-0040/HJ-0041 | Body Materials: SS304/316L | Waterproof Craft: Resin filled |
| | 25W | | ✓ | ✓ | X | HJ-0050 | Lens Material: PC | |
| | 35W | | ✓ | ✓ | X | HJ-0010 HJ-0-10V | | |

1)Concrete Pool(WM)

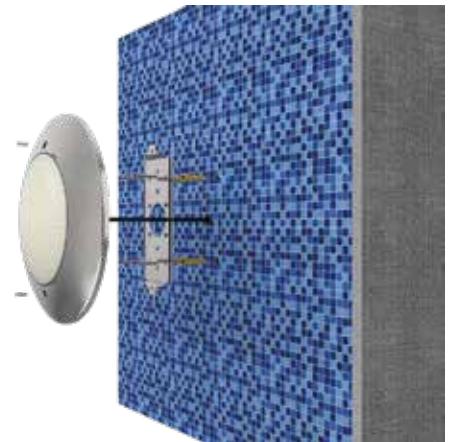


2)Vinyl Liner Pool(V)

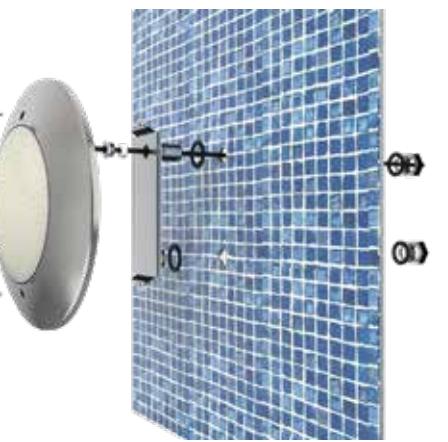

3)Fiberglass Pool(FG)---WM01



4)Vinyl Liner Pool & Fiberglass Pool(FGV)---WM03


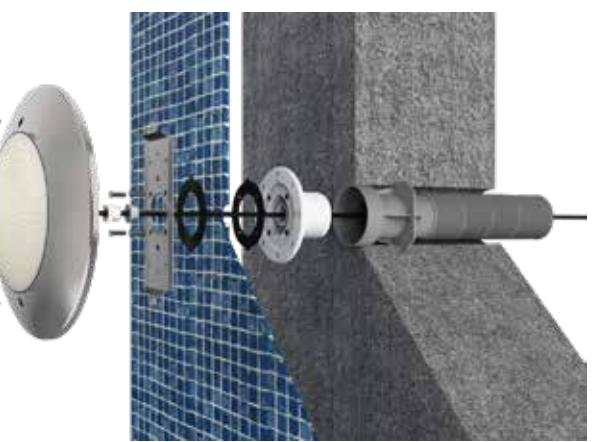


Model: HJ-WR-SS95/HJ-WR-SS100



HJ-WR-SS95

HJ-WR-SS100

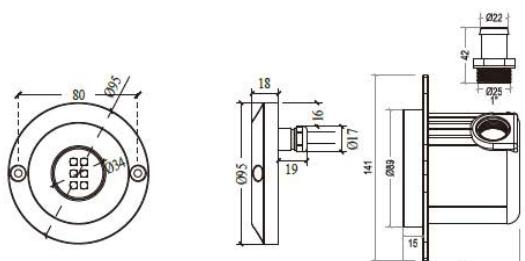




| Model | Power | Voltage | CW/WW | RGB W | RGB W | Controller | Basic Parameters |
|---------------------------|-------|--------------|-------|-------|-------|------------|--|
| HJ-WR-SS95 HJ-WR-SS100 | 10W | 12V (AC) | ✓ | X | X | / | Waterproof Rating: IP 68 Body Material: 316L Lens Material: PC Beam Angle: 120° |
| | 10W | 12V/24V (DC) | ✓ | ✓ | X | HJ-0050 | |
| | 18W | | ✓ | ✓ | X | HJ-O-10V | |
| | 35W | | ✓ | X | X | | |

Model: HJ-WR-SS150/HJ-WR-SS150L



HJ-WR-SS150

HJ-WR-SS150L

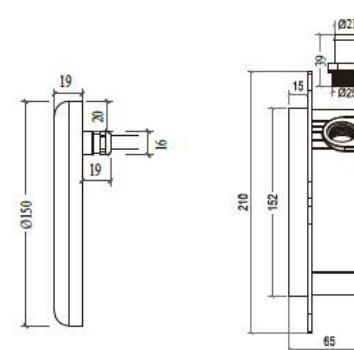

| Model | Power | Voltage | CW/WW | RGB W | RGB W | Controller | Basic Parameters | Product Features |
|--------------|-------|-----------------|-------|-------|-------|-----------------|---|------------------|
| HJ-WR-SS150 | 18W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 | Waterproof Rating: IP 68 Body Material: SS316L Lens Material: PC | Beam Angle: 120° |
| | 35W | | ✓ | ✓ | ✓ | HJ-0040/HJ-0041 | | |
| | 50W | | ✓ | X | X | HJ-0050 | | |
| | 18W | | ✓ | ✓ | ✓ | HJ-0010 | | |
| HJ-WR-SS150L | 25W | | ✓ | ✓ | ✓ | HJ-0-10V | | Beam Angle: 45° |
| | | | | | | | | |


WR—Wall-Mount&Recessed

Model: HJ-WR-SS180/HJ-WR-SS180L




HJ-WR-SS180

HJ-WR-SS180L

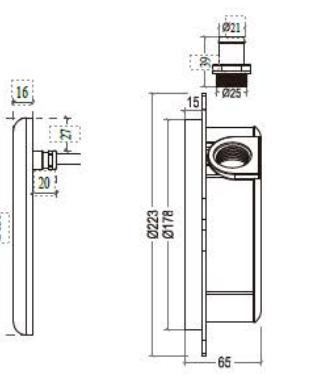

| Model | Power | Voltage | CW/WW | RGB W | RGB W | Controller | Basic Parameters | Product Features |
|--------------|-------|-----------------|-------|-------|-------|-----------------|--|------------------|
| HJ-WR-SS180 | 18W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 | Waterproof Rating: IP 68 Body Material: SS316L Lens Material: PC | Beam Angle: 120° |
| | 35W | | ✓ | ✓ | ✓ | HJ-0040/HJ-0041 | | |
| | 60W | | ✓ | X | X | HJ-0050 | | |
| | 18W | | ✓ | ✓ | ✓ | HJ-0-10V | | |
| HJ-WR-SS180L | 25W | | ✓ | ✓ | ✓ | | | Beam Angle: 45° |
| | 35W | | ✓ | ✓ | X | | | |

Installation for Concrete Pool(WR)

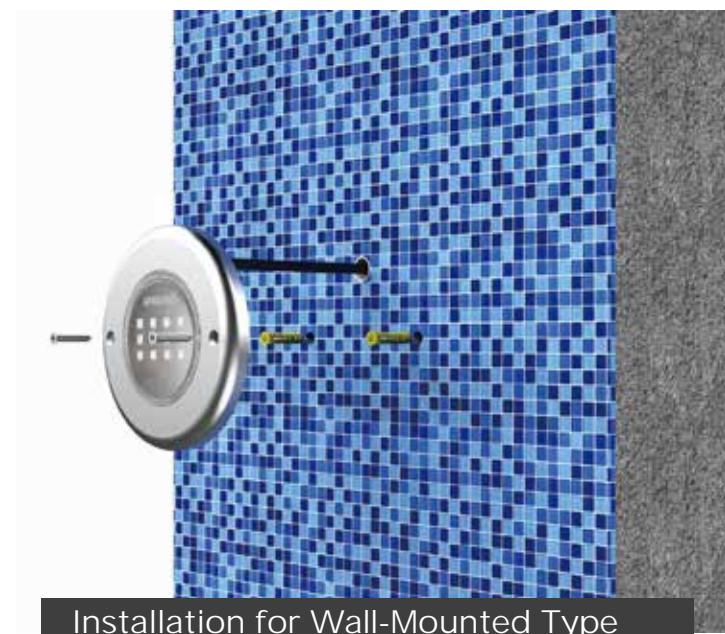

Installation for Wall-Mounted Type



Installation for Recessed Type



WR—Wall-Mount&Recessed



Model : HJ-RC-PC110/HJ-RC-PC110SS

RC Series



HJ-RC-PC110

HJ-RC-PC110SS

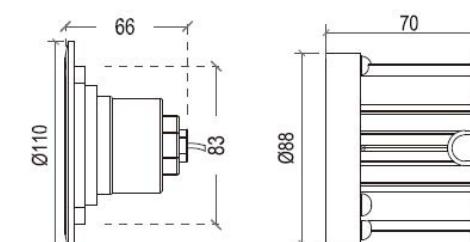


Model : HJ-RC-PC195/HJ-RC-PC195SS

RC Series



HJ-RC-PC195

HJ-RC-PC195SS

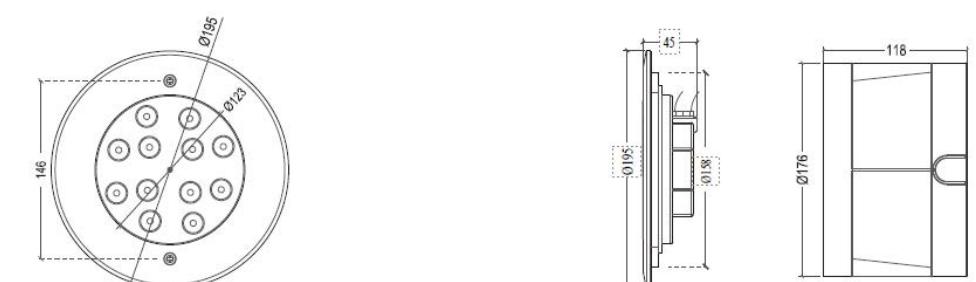



| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|---------------|-------|--------------------|-------|-----|------|---|---|--|
| HJ-RC-PC110 | 3W | 12V/24V (AC/DC) | ✓ | ✓ | X | HJ-0020 HJ-0040/HJ- 0041 HJ- 0050 HJ-0010 HJ- 0-10V | Waterproof Rating : IP 68 Lens Material : PC Working Temperature : -20°C~48°C Application : Concrete Pool/Sauna Beam Angle : 15°30°45°60° | Body Material : ABS+UV Cover Material : PC |
| HJ-RC-PC110SS | | | | | | | | Body Material : ABS+UV Cover Material : SS316L |

Model : HJ-RC-PC165/HJ-RC-PC165SS



HJ-RC-PC165




HJ-RC-PC165SS

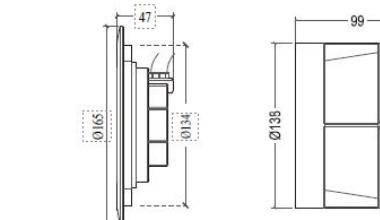

| Model | Power | Voltage | CW/W | RGB | RGBW | Controller | Basic Parameters | Product Features |
|---------------|-------|--------------------|------|-----|------|------------|--|--|
| HJ-RC-PC165 | 6W | 12V/24V (AC/DC) | | ✓ | ✓ | X | HJ-0020 HJ-0040/HJ- 0041 HJ-0050 HJ-0010 HJ-0-10V | Waterproof Rating : IP 68 Lens Material : PC Working Temperature : -20°C~48°C Application : Concrete Pool/Sauna Beam Angle : 15°30°45°60° |
| HJ-RC-PC165SS | | | | | | | | Body Material : ABS+UV Cover Material : SS316L |

| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|---------------|-------|--------------------|-------|-----|------|--|--|--|
| HJ-RC-PC195 | 12W | 12V/24V (AC/DC) | ✓ | ✓ | X | HJ-0020 HJ-0040/HJ- 0041 HJ-0050 HJ-0010 HJ-0-10V | Waterproof Rating : IP 68 Lens Material : PC Working Temperature : -20°C~48°C Application : Concrete Pool/Sauna Beam Angle : 15°30°45°60° | Body Material : ABS+UV Cover Material : PC |
| HJ-RC-PC195SS | | | | | | | | Body Material : ABS+UV Cover Material : SS316L |

Model : HJ-RC-PC210

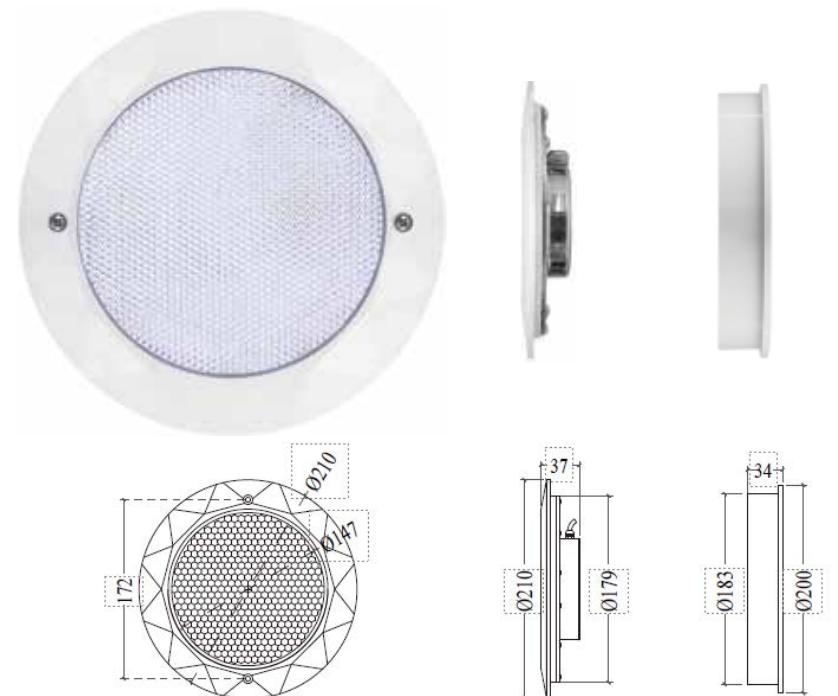


| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|-------------|-------|--------------------|-------|-----|------|--------------------------------|--|
| | 12W | | ✓ | ✓ | X | HJ-0020 HJ-0040/HJ-0041 | Waterproof Rating : IP 68 Body Material : ABS+UV |
| HJ-RC-PC210 | 18W | 12V/24V (AC/DC) | ✓ | ✓ | X | HJ-0050 HJ-0010 HJ-0-10V | Lens Material : PC with anti-glare design Beam Angle : 120° |
| | 25W | | ✓ | ✓ | X | | |


Model : HJ-RC-SS52/HJ-RC-SS62



HJ-RC-SS52

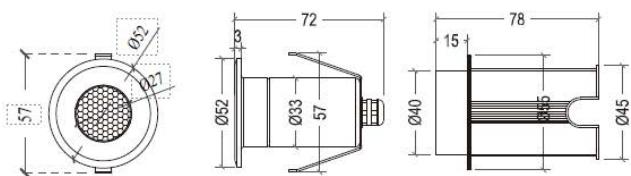

HJ-RC-SS62

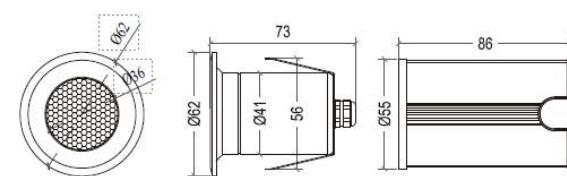


| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|------------|----------|--------------------|--------|--------|--------|--|--|
| HJ-RC-SS52 | 3W 6W | 12V/24V (AC/DC) | ✓ ✓ | X ✓ | X X | HJ-0-10V HJ-0040/HJ-0041 HJ-0050 HJ-0-10V | Waterproof Rating : IP 68 Body Material: SS304/SS316L Lens Material : Tempered glass Beam Angle : 120° |
| HJ-RC-SS62 | 3W 6W | 12V/24V (AC/DC) | ✓ ✓ | ✓ ✓ | ✓ X | HJ-0-10V | |


Model : HJ-RC-SS75/HJ-RC-SS105



HJ-RC-SS75

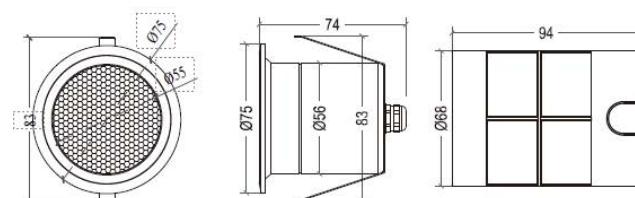

HJ-RC-SS105

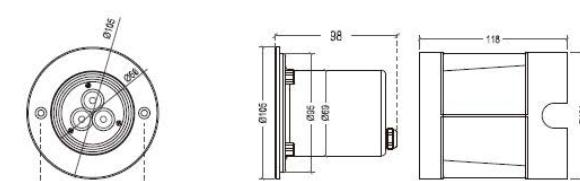

| Model | Power | Voltage | CW/W | RGB | RGBW | Controller | Basic Parameters | Product Features |
|-------------|-----------------|---------|-------------|-------------|-------------|---------------------------------------|---|------------------|
| HJ-RC-SS75 | 3W 9W 18W | 12V/24V | ✓ ✓ ✓ | ✓ ✓ X | ✓ X X | HJ-0020 HJ-0040/HJ-0041 HJ-0050 | Waterproof Rating : IP 68 Body Material: SS304/SS316L Lens Material : Tempered glass Beam Angle : 120° Beam Angle : 15°30°45°60° | |
| HJ-RC-SS105 | 6W 12W | (AC/DC) | ✓ ✓ | ✓ ✓ | ✓ X | HJ-0010 HJ-0-10V | | |


Model : HJ-RC-SS110S/HJ-RC-SS110H (Models are named with S/H based on LED brands)



HJ-RC-SS110S



HJ-RC-SS110H

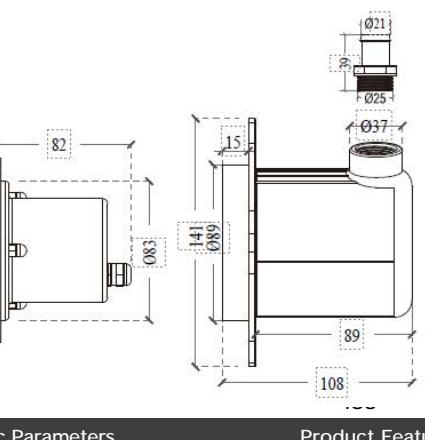

| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|--------------|-----------------------|--------------------|------------------|------------------|------------------|--|--|---------------------------|
| HJ-RC-SS110S | 5W 3W 9W 18W | 12V/24V (AC/DC) | ✓ ✓ ✓ ✓ | ✓ ✓ X X | ✓ ✓ X X | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V DMX512 | Waterproof Rating : IP 68 Body Material: SS304/SS316L Lens Material : Tempered glass Working Temperature : -20°C-48°C Application : Concrete Pool/Sauna | Beam Angle : 120° |
| HJ-RC-SS110H | | | | | | | | Beam Angle : 15°30°45°60° |


Model : HJ-RC-SS160S/HJ-RC-SS160H (Models are named with S/H based on LED brands)



HJ-RC-SS160S



HJ-RC-SS160H

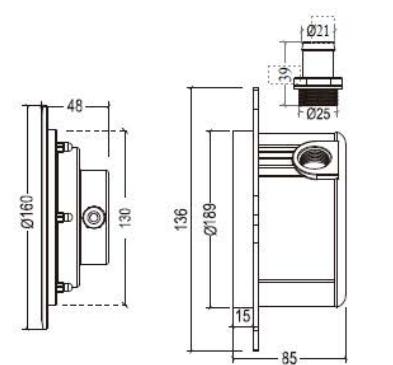

| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|--------------|------------------|--------------------|-------------|-------------|-------------|--|--|---------------------------|
| HJ-RC-SS160S | 10W 9W 12W | 12V/24V (AC/DC) | ✓ ✓ ✓ | ✓ ✓ ✓ | ✓ ✓ X | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V DMX512 | Waterproof Rating : IP 68 Body Material: SS304/SS316L Lens Material : Tempered glass Working Temperature : -20°C-48°C Application : Concrete Pool/Sauna | Beam Angle : 100° |
| HJ-RC-SS160H | 25W | | | | | | | Beam Angle : 15°30°45°60° |

Model : HJ-RC-SS19OS/HJ-RC-SS19OH Models are named with S/H based on LED brands)



| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|--------------|-------|---------|-------|-----|------|-------------------------|---|-------------------|
| HJ-RC-SS19OS | 15W | | ✓ | ✓ | X | HJ-0020 | Waterproof Rating : IP 68 Body Material: SS304/SS316L Lens Material : Tempered glass Working Temperature : -20°C~48°C Application : Concrete Pool/Sauna | Beam Angle : 100° |
| | 12W | 12V/24V | ✓ | ✓ | ✓ | HJ-0040/HJ-0041 | | |
| HJ-RC-SS19OH | 18W | (AC/DC) | ✓ | ✓ | X | HJ-0050 | | |
| | 30W | | ✓ | ✓ | X | HJ-0010 HJ-0-10V DMX512 | | |

Model : HJ-RC-SS146/HJ-RC-SS258



| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|-------------|-------|---------|-------|-----|------|-------------------------|--|
| HJ-RC-SS146 | 12W | | ✓ | ✓ | ✓ | HJ-0020 | Waterproof Rating : IP 68 Body Material: SS304/SS316L Lens Material : Tempered glass Beam Angle : 120° |
| | 18W | 12V/24V | ✓ | ✓ | X | HJ-0040/HJ-0041 | |
| | 25W | (AC/DC) | ✓ | ✓ | X | HJ-0050 | |
| HJ-RC-SS258 | 18W | | ✓ | ✓ | ✓ | HJ-0010 HJ-0-10V DMX512 | |
| | 35W | 12V/24V | ✓ | ✓ | X | | |
| | 50W | (AC/DC) | ✓ | X | X | | |

Model : HJ-RC-SS146-1/HJ-RC-SS258-1




| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|---------------|-------|---------|-------|-----|------|-------------------------|--|
| HJ-RC-SS146-1 | 12W | | ✓ | ✓ | X | HJ-0020 | Waterproof Rating : IP 68 Body Material: SS304/SS316L Lens Material : PC Waterproof Craft : Resin filled Beam Angle : 120° |
| | 18W | 12V/24V | ✓ | ✓ | X | HJ-0040/HJ-0041 | |
| HJ-RC-SS258-1 | 25W | (AC/DC) | ✓ | ✓ | X | HJ-0050 | |
| | 35W | | ✓ | ✓ | X | HJ-0010 HJ-0-10V DMX512 | |

Model : HJ-RC-SS195K/HJ-RV-SS195K HJ-RC-SS195/HJ-RV-SS195






| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|--------------|-------|---------|-------|-----|------|-----------------|---|------------------|
| HJ-RC-SS195K | 12W | | ✓ | ✓ | ✓ | HJ-0020 | Waterproof Rating : IP 68 Body Material: SS304/SS316L Lens Material : Tempered glass Beam Angle : 90° | |
| HJ-RV-SS195K | 18W | 12V/24V | ✓ | ✓ | X | HJ-0040/HJ-0041 | | |
| | 30W | (AC/DC) | ✓ | ✓ | ✓ | HJ-0050 | | |
| HJ-RC-SS195 | 9W | 12V/24V | ✓ | ✓ | X | HJ-0010 | | |
| HJ-RV-SS195 | 12W | | ✓ | ✓ | X | HJ-0-10V DMX512 | | |
| | 35W | | ✓ | ✓ | X | | | |

Model : HJ-RC-SS270K
HJ-RV-SS270KHJ-RC-SS270H
HJ-RV-SS270H


HJ-RC-SS270K/HJ-RV-SS270K

HJ-RC-SS270H/HJ-RV-SS270H







Stainless Steel Niche for Vinyl Liner Pool

| Model | Pow | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|--------------|-----|----------------------|-------|-----|------|-----------------|--------------------------------|------------------|
| HJ-RC-SS270K | 18W | | ✓ | ✓ | ✓ | HJ-0020 | | |
| HJ-RV-SS270K | 35W | | ✓ | ✓ | ✓ | HJ-0040/HJ-0041 | | |
| | 50W | | ✓ | ✓ | X | | | |
| HJ-RC-SS270H | 18W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0050 | Waterproof Rating : IP 68 | Beam Angle : 90° |
| HJ-RV-SS270H | 25W | | ✓ | ✓ | X | HJ-0010 | Body Material: SS304/SS316L | |
| | 35W | | ✓ | ✓ | X | HJ-O-10V | Lens Material : Tempered glass | |
| | 50W | | ✓ | X | X | DMX512 | | |

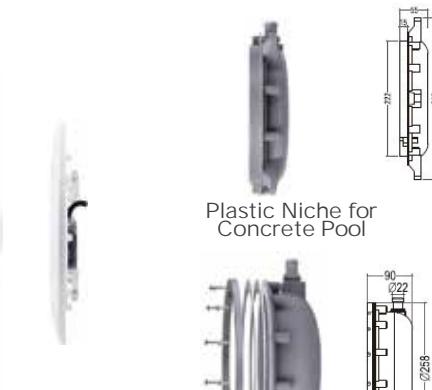Model : HJ-RC-SS270S HJ-RC-PC282
HJ-RV-SS270S HJ-RV-PC282

HJ-RC-SS270S/HJ-RV-SS270S

HJ-RC-PC282/HJ-RV-PC282



Stainless Steel Niche for Vinyl Liner Pool





| Model | Power | Volta | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|--------------|-------|----------------------|-------|-----|------|-----------------|---------------------------------|-------------------|
| HJ-RC-SS270S | 18W | | ✓ | ✓ | X | HJ-0020 | | |
| HJ-RV-SS270S | 25W | | ✓ | ✓ | X | HJ-0040/HJ-0041 | Waterproof Rating : IP 68 | |
| | 35W | 12V/24V (AC/DC) | ✓ | ✓ | X | HJ-0050 | Lens Material : PC | Beam Angle : 120° |
| HJ-RC-PC282 | 18W | | ✓ | ✓ | X | HJ-0010 | Body Material : SS304/SS316L | |
| HJ-RV-PC282 | 25W | | ✓ | ✓ | X | HJ-O-10V | Waterproof Craft : Resin filled | |
| | 35W | | ✓ | ✓ | X | DMX512 | | |

Model : HJ-RC-SS115/HJ-RV-SS115



Plastic Niche for Concrete Pool

Stainless Steel Niche for Vinyl Liner Pool

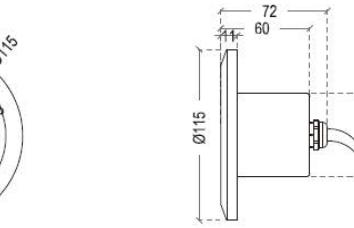

| Model | Power | Voltage | CW/W | RGB | RGBW | Controller | Basic Parameters | Product Features |
|-------------|-------|--------------------|------|-----|------|--|---|------------------|
| HJ-RC-SS115 | 12W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-O-10V DMX512 | Waterproof Rating: IP 68 Body Materials: SS304/316L Lens Material: Tempered glass | Beam Angle: 120° |
| | 18W | | ✓ | ✓ | X | | | |
| | 25W | | ✓ | ✓ | X | | | |





Model : HJ-RC-SS200/HJ-RV SS200



Plastic Niche for Concrete Pool

Plastic Niche for Vinyl Liner Pool

Stainless Steel Niche for Vinyl Liner Pool

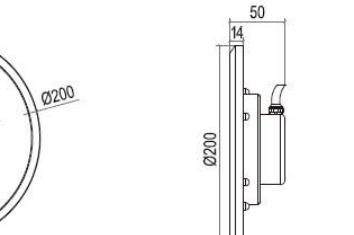

| Model | Power | Volta | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|-------------|-------|--------------------|-------|-----|------|-----------------|----------------------------------|------------------|
| HJ-RC-SS200 | 18W | | ✓ | ✓ | ✓ | HJ-0020 | | |
| HJ-RV-SS200 | 35W | | ✓ | ✓ | ✓ | HJ-0040/HJ-0041 | Waterproof Rating: IP 68 | Beam Angle: 15° |
| | 50W | 12V/24V (AC/DC) | ✓ | ✓ | X | HJ-0050 | Body Materials: SS304/316L | 30° 45° 15X50° |
| HJ-RC-PC282 | 25W | | ✓ | ✓ | X | HJ-0010 | Lens Material: Tempered glass | |
| HJ-RV-PC282 | 35W | | ✓ | ✓ | X | HJ-O-10V | DMX512 | |


| Model | Power | Voltage | CW/W | RGB | RGBW | Controller | Basic Parameters | Product Features |
|-------------|-------|--------------------|------|-----|------|--|--------------------------|-----------------------------------|
| HJ-RC-SS200 | 18W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-O-10V DMX512 | Waterproof Rating: IP 68 | Beam Angle: 15° 30° 45° 15X50° |
| | 35W | | ✓ | ✓ | ✓ | | | |
| | 50W | | ✓ | ✓ | X | | | |

Model : HJ-RC-SS280 HJ-RC-SS286
HJ-RV-SS280 HJ-RV-SS286



Model : HJ-RC-PC280/HJ-RV-PC280

| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|----------------------------|-------|--------------------|-------|-----|------|--|--|------------------|
| HJ-RC-SS280 HJ-RV-SS280 | 18W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V DMX512 | Waterproof Rating: IP 68 Body Material: SS304/SS316L Lens Material: Tempered glass | Beam Angle: 120° |
| | 35W | | ✓ | ✓ | X | | | |
| | 50W | | ✓ | x | X | | | |
| | 80W | | ✓ | x | X | | | |
| HJ-RC-SS286 HJ-RV-SS286 | 18W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | | Beam Angle: 45° | |
| | 35W | | ✓ | ✓ | X | | | |
| | 50W | | ✓ | x | X | | | |

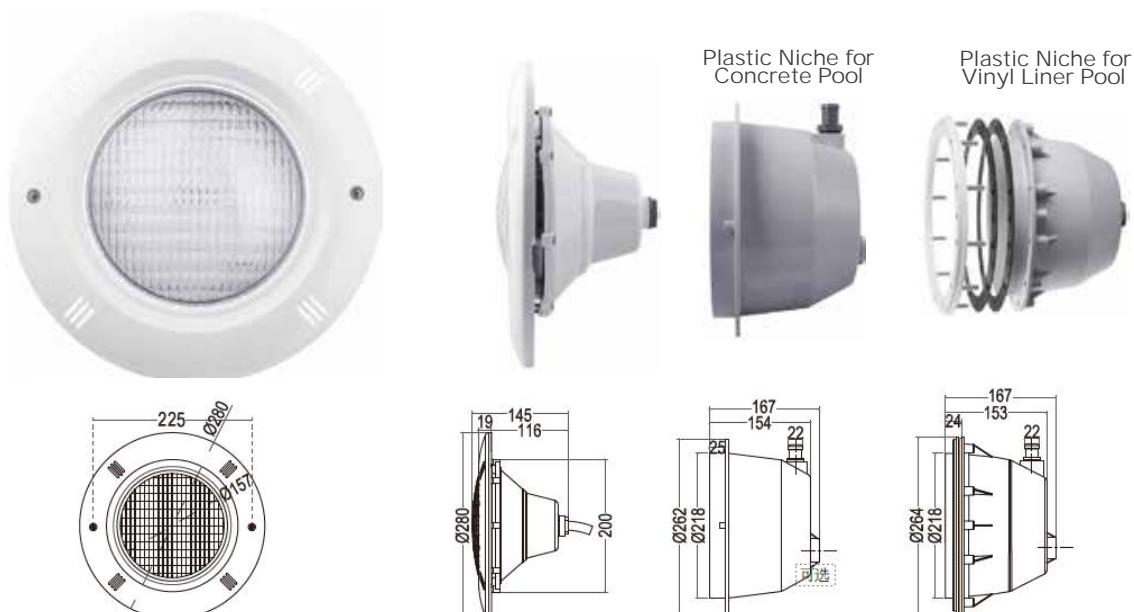

| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|----------------------------|-------|--------------------|-------|-----|------|--|---|------------------|
| HJ-RC-SS280 HJ-RV-SS280 | 18W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V DMX512 | Waterproof Rating: IP 68 Body Material: ABS+UV Lens Material: PC with anti-glare design | Beam Angle: 120° |
| | 35W | | ✓ | ✓ | X | | | |
| | 50W | | ✓ | ✓ | X | | | |
| | 80W | | ✓ | x | X | | | |

Model : HJ-RC-PC290/HJ-RV-PC290




| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|-------------|-------|---------|-------|-----|------|-----------------|---|
| HJ-RC-PC290 | 18W | | ✓ | ✓ | ✓ | HJ-0020 | Waterproof Rating : IP 68 |
| | 25W | 12V/24V | ✓ | ✓ | X | HJ-0040/HJ-0041 | Body Material : ABS+UV |
| | 35W | (AC/DC) | ✓ | ✓ | X | HJ-0050 | Lens Material : PC with anti-glare design |
| | 50W | | ✓ | X | X | HJ-0010 | Beam Angle : 120° |
| | | | | | | HJ-0-10V | |
| | | | | | | DMX512 | |

1) Installation for Concrete Pool(RC)



2) Installation for Vinyl Liner Pool(RV)

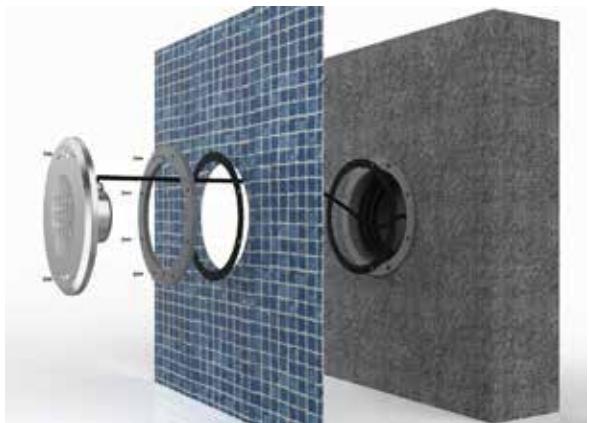

3) Installation for Stainless Steel Vinyl Liner Pool



Model : HJ-FC-PC55




| Model | Power | Voltage | CW/WW | RGB | RGB W | Controller | Basic Parameters |
|------------|-------|---------|-------|-----|-------|---|--|
| HJ-FC-PC55 | 12W | 12V/24V | ✓ | ✓ | X | HJ-0020 | Waterproof Rating : IP 68 Body Material : ABS+UV Lens Material : PC with anti-glare design Beam Angle : 120° |
| | 18W | (AC/DC) | ✓ | ✓ | X | HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-O-10V | |

Model : HJ-FC-PC95/HJ-FC-PC125




| Model | Power | Voltage | CW/WW | RGB | RGB W | Controller | Basic Parameters | Product Features |
|-------------|-------|---------|-------|-----|-------|---|--|---------------------------------|
| HJ-FC-PC95 | 6W | 12V/24V | ✓ | ✓ | X | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-O-10V | Waterproof Rating : IP 68 Body Material : ABS+UV Lens Material : PC with anti-glare design Beam Angle : 120° | Waterproof Craft : Resin filled |
| HJ-FC-PC125 | 9W | (AC/DC) | ✓ | ✓ | X | | | |

Model : HJ-FC-SS75-1.5/HJ-FC-SS95-1.5

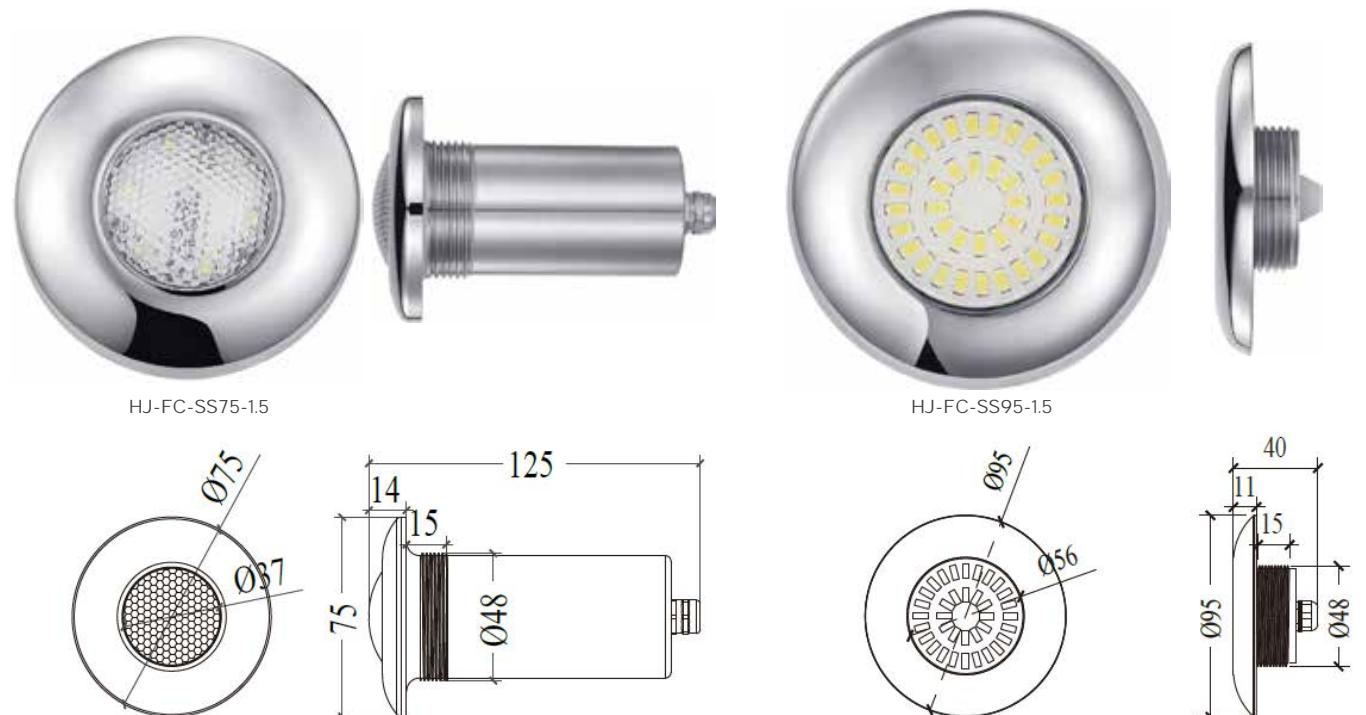

| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|------------|-------|---------|-------|-----|------|---|--|---|
| HJ-FC-SS75 | 9W | | ✓ | ✓ | ✓ | HJ-0020 | Waterproof Rating : IP 68 Body Material : SS304/316L Beam Angle : 120° | Lens Material : PC with anti-glare design |
| | 18W | 12V/24V | ✓ | ✓ | ✓ | HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-O-10V | | Waterproof Craft : Resin filled |
| | 30W | (AC/DC) | ✓ | ✓ | X | | | |
| HJ-FC-SS95 | 6W | | ✓ | ✓ | X | HJ-O-10V | | |

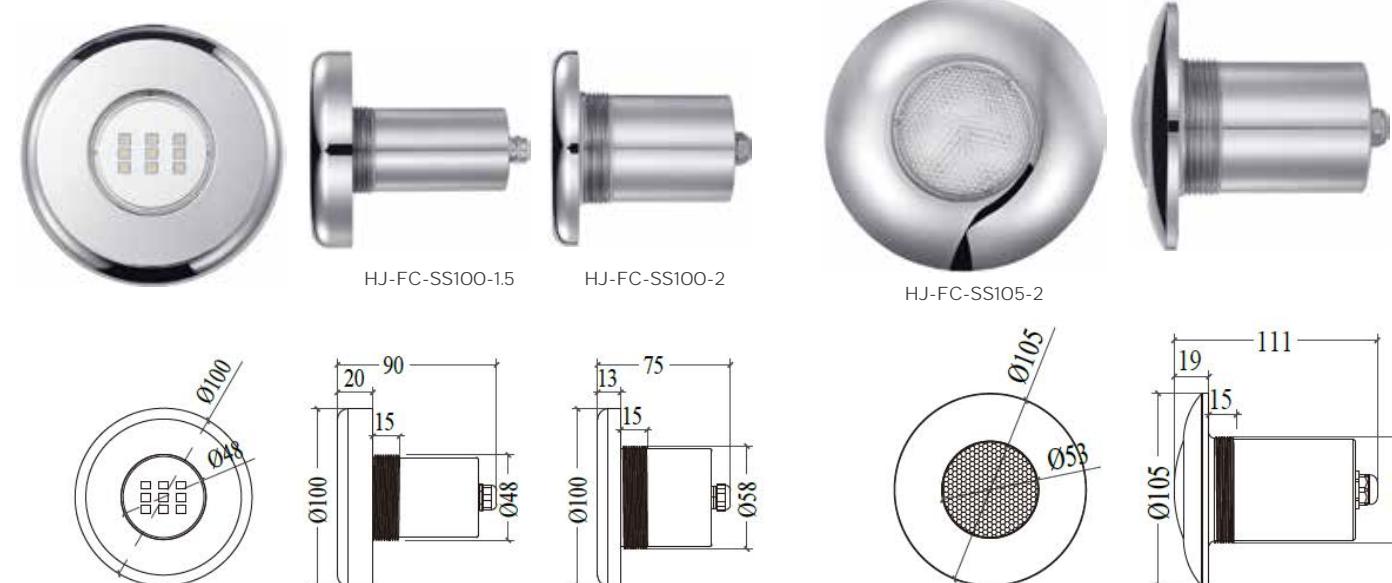
Model : HJ-FC-SS100-1.5 HJ-FC-SS105-2
HJ-FC-SS100-2

| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|-----------------|-------|---------|-------|-----|------|----------------------------|--|
| HJ-FC-SS100-1.5 | 10W | | ✓ | ✓ | X | HJ-0020 | Waterproof Rating : IP 68 Body Material : SS304/316L Lens Material : PC with anti-glare design Beam Angle : 120° |
| | 18W | | ✓ | ✓ | X | HJ-0050 | |
| | 35W | 12V/24V | ✓ | X | X | HJ-O-10V | |
| HJ-FC-SS100-2 | 9W | (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 | |
| HJ-FC-SS105 | 18W | | ✓ | ✓ | X | HJ-0050 HJ-0010 | |
| | 30W | | ✓ | ✓ | X | DMX512 | |

Model : HJ-FC-PC94-1.5 HJ-FC-PC168-1.5
HJ-FC-PC94-2 HJ-FC-PC168-2




HJ-FC-PC94-1.5 HJ-FC-PC94-2

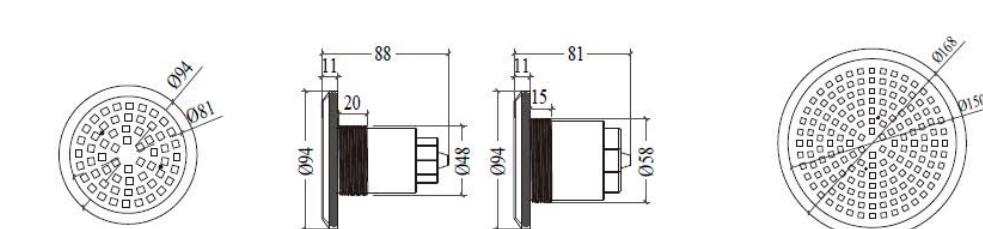

HJ-FC-PC168-1.5 HJ-FC-PC168-2

| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|----------------------------------|-------------------|---------|-------|-----|------|--|---|
| HJ-FC-PC94-1.5 HJ-FC-PC94-2 | 9W | 12V/24V | ✓ | ✓ | ✗ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0-10V | Waterproof Rating : IP 68 Body Material : ABS+UV Lens Material : PC Waterproof Craft : Resin filled Beam Angle : 120° |
| HJ-FC-PC168-1.5 HJ-FC-PC168-2 | 12W 18W 25W | (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V DMX512 | |

Model : HJ-FC-PC100-1.5/HJ-FC-PC100-2

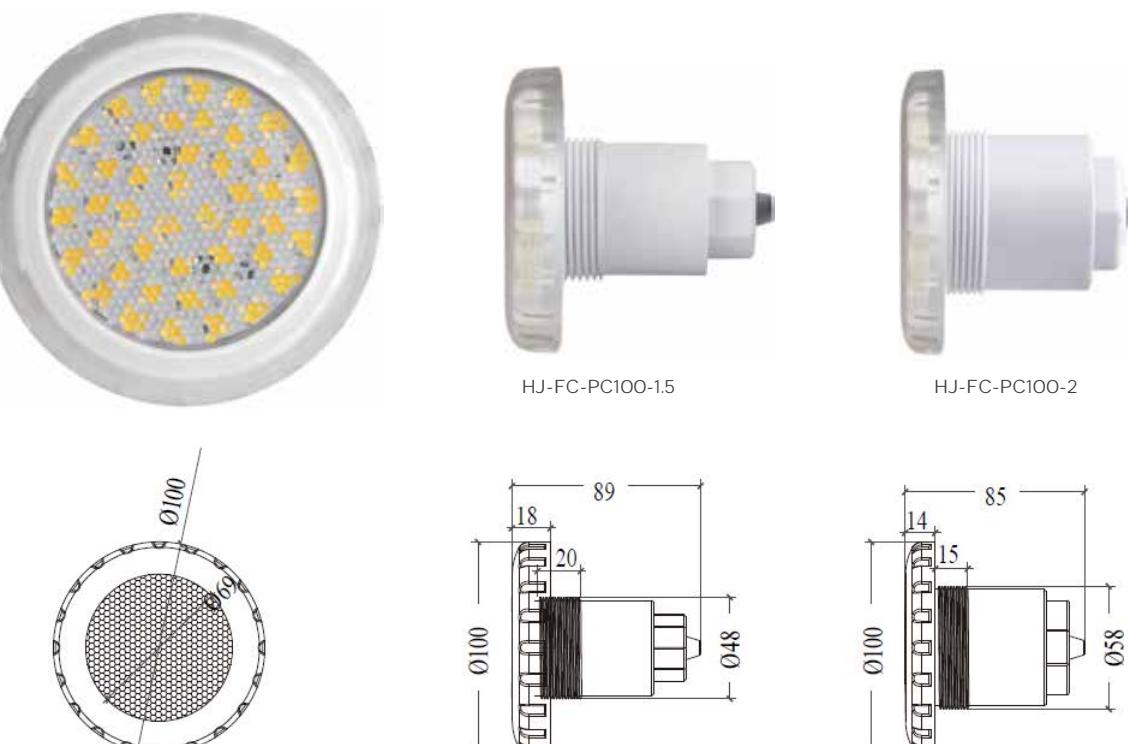

HJ-FC-PC100-1.5

HJ-FC-PC100-2

| Model | Power | Voltage | CW/W | RGB | RGBW | Controller | Basic Parameters |
|----------------------------------|-----------|--------------------|------|-----|------|---|--|
| HJ-FC-PC100-1.5 HJ-FC-PC100-2 | 9W 18W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0-10V | Waterproof Rating : IP 68 Beam Angle : 120° Body Material : ABS+UV Lens Material : PC with anti-glare design |

Model : HJ-FC-SS260-1.5 HJ-FC-PC260-1.5
HJ-FC-SS260-2 HJ-FC-PC260-2




HJ-FC-SS260-1.5 HJ-FC-SS260-2

HJ-FC-PC260-1.5 HJ-FC-PC260-2


| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|----------------------------------|------------|--------------------|-------|-----|------|---------------------------------------|--|----------------------------|
| HJ-FC-SS260-1.5 HJ-FC-SS260-2 | 18W 25W | 12V/24V (AC/DC) | ✓ | ✓ | ✗ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 | Waterproof Rating : IP 68 Lens Material : PC Waterproof Craft : Resin filled Beam Angle : 120° | Body Material : SS304/316L |
| HJ-FC-PC260-1.5 HJ-FC-PC260-2 | 35W | | ✓ | ✓ | ✗ | HJ-0010 HJ-0-10V | | Body Material : ABS+UV |

Installation for Concrete Pool(FC)


1)Concrete Pool(FC) — GR01/GR02+FC01(2"Wall conduit)

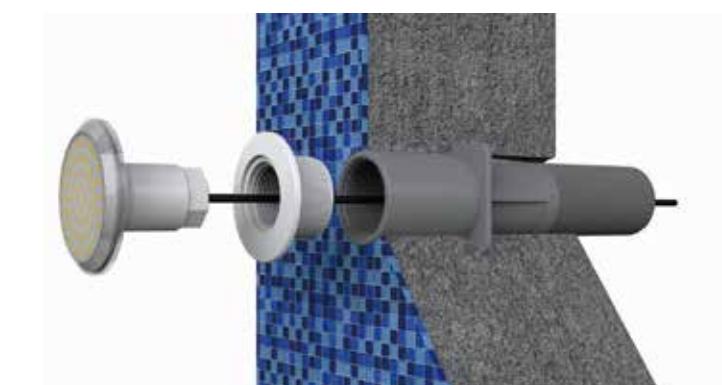

2)Concrete Pool(FC) — 1.5"Wall conduit

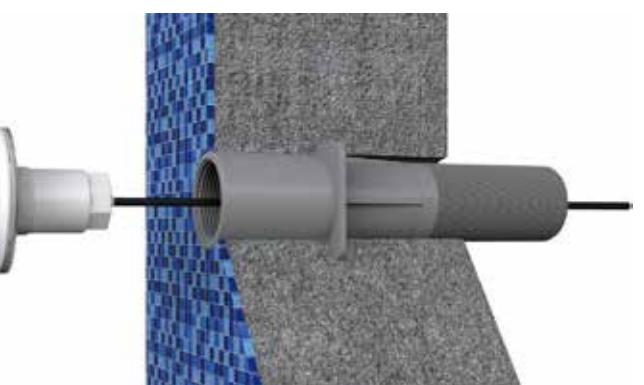

3)Concrete Pool(FC) — 2"Wall conduit

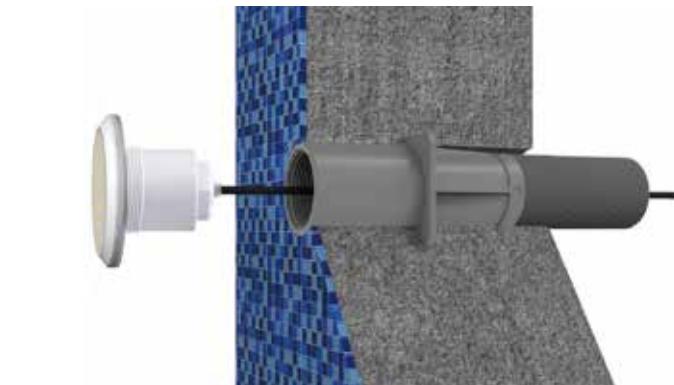

Model : HJ-FG-SS75-1.5
HJ-FG-SS100-1.5
HJ-FG-SS100-2




| Model | Power | Voltage | CW/WW | RGB W | Controller | Basic Parameters | Product Features |
|-------------------------------|-------|---------|-------|-------|-----------------|--|---|
| HJ-FG-SS75-1.5 | 9W | | ✓ | ✓ X | HJ-0020 | Waterproof Rating : IP 68 Body Material : SS304/316L Beam Angle : 120° | Lens Material : PC with anti-glare design Lens Material : PC |
| | 18W | 12V/24V | ✓ | ✓ X | HJ-0040/HJ-0041 | | |
| | 25W | (AC/DC) | ✓ | ✓ X | HJ-0050 | | |
| HJ-FG-SS100-1.5 HJ-FG-SS100-2 | 10W | | ✓ | ✓ X | HJ-0-10V | | |
| | 18W | | ✓ | ✓ X | | | |
| | 35W | | ✓ X X | | | | |

Model : HJ-FG-SS105/HJ-FG-PC95




| Model | Power | Voltage | CW/W | RGB W | Controller | Basic Parameters | Product Features |
|-------------|-------|---------|------|-------|-------------------------|--|----------------------------|
| HJ-FG-SS105 | 18W | 12V/24V | ✓ | ✓ X | HJ-0020 | Waterproof Rating : IP 68 Beam Angle : 120° | Body Material : SS304/316L |
| | 25W | (AC/DC) | ✓ | ✓ X | HJ-0040/HJ-0041 HJ-0050 | | |
| HJ-FG-PC95 | 6W | | ✓ | ✓ ✓ | HJ-0010 | Lens Material : PC with anti-glare design | Body Material : ABS+UV |
| | 12W | | ✓ | ✓ X | HJ-0-10V DMX512 | | |

Model : HJ-FG-PC100-1.5/HJ-FG-PC100-2

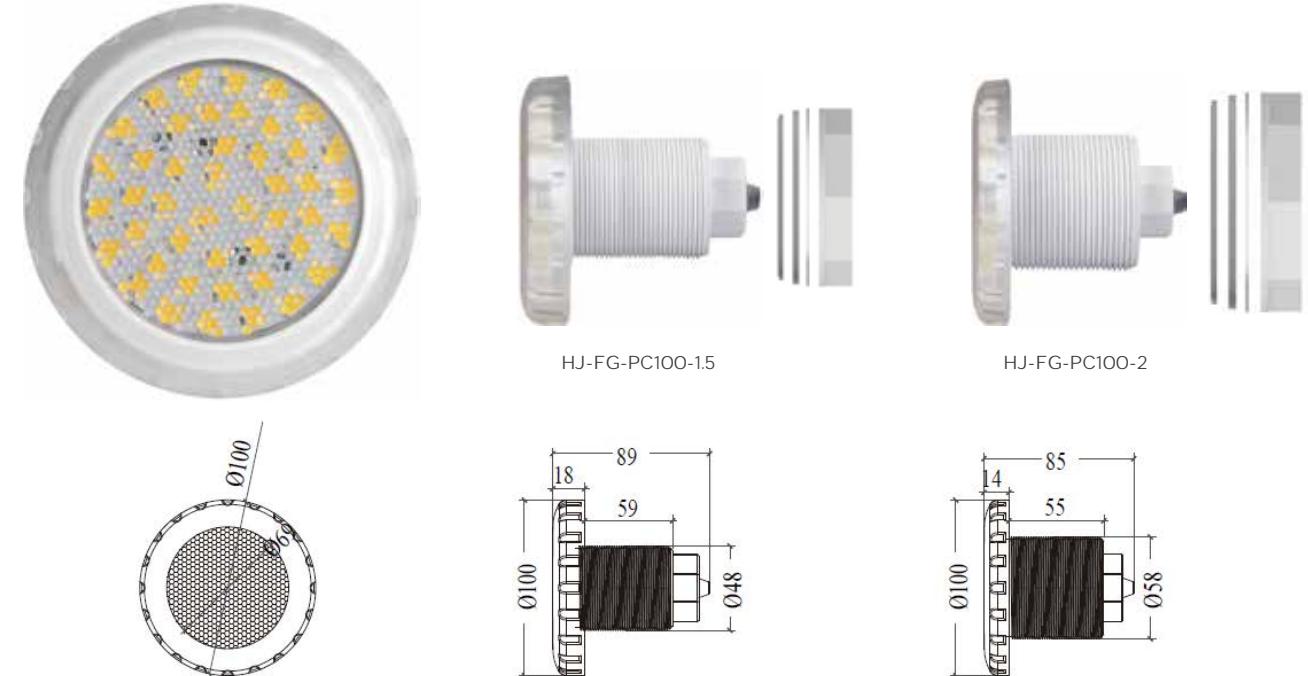


Model : HJ-FG-PC94-1.5/HJ-FG-PC94-2

| Model | Power | Voltage | CW/W | RGB W | Controller | Basic Parameters | Product Features |
|----------------------------------|-------|--------------------|------|-------|----------------------------------|---|------------------|
| HJ-FG-PC100-1.5 HJ-FG-PC100-2 | 6W | | ✓ | ✓ ✓ | HJ-0020 | Waterproof Rating: IP 68 Body Material: ABS+UV Lens Material: PC with anti-glare design | Beam Angle: 120° |
| | | 12V/24V (AC/DC) | ✓ | ✓ X | HJ-0040/HJ-0041 HJ-0050 HJ-0-10V | | |

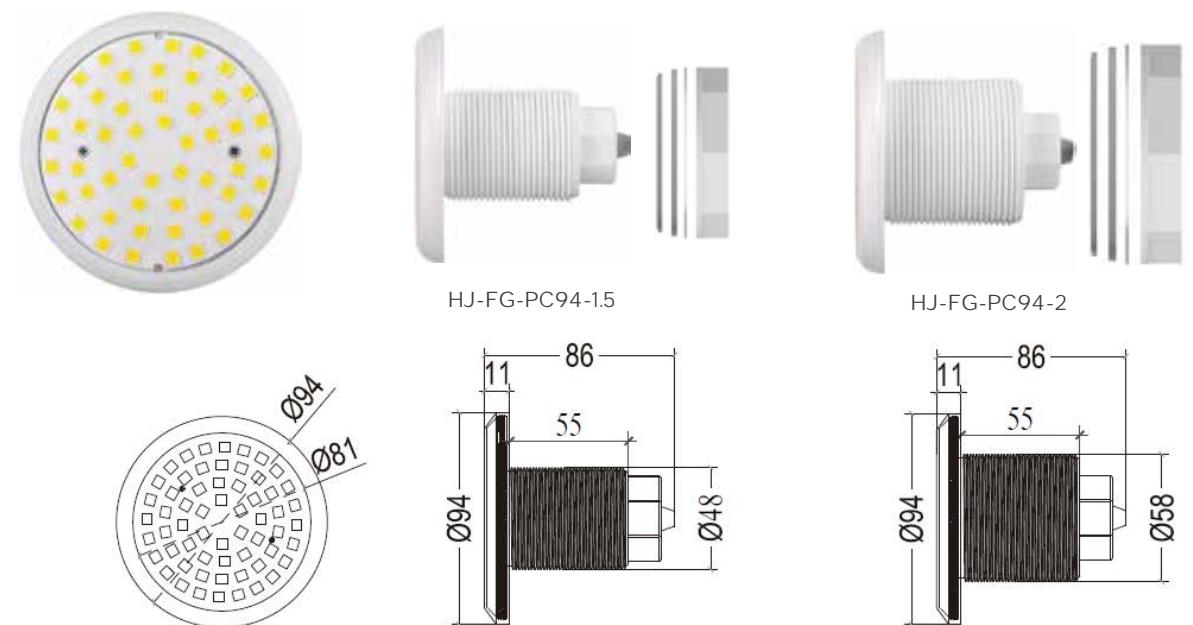


| Model | Power | Voltage | CW/W | RGB W | Controller | Basic Parameters | Product Features |
|--------------------------------|-------|--------------------|------|-------|---|--|------------------|
| HJ-FG-PC94-1.5 HJ-FG-PC94-2 | 12W | 12V/24V (AC/DC) | ✓ | ✓ X | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0-10V | Waterproof Rating: IP 68 Body Material: ABS+UV Lens Material: PC Waterproof Craft: Resin filled | Beam Angle: 120° |

Model : HJ-FG-PC168-1.5/HJ-FG-PC168-2

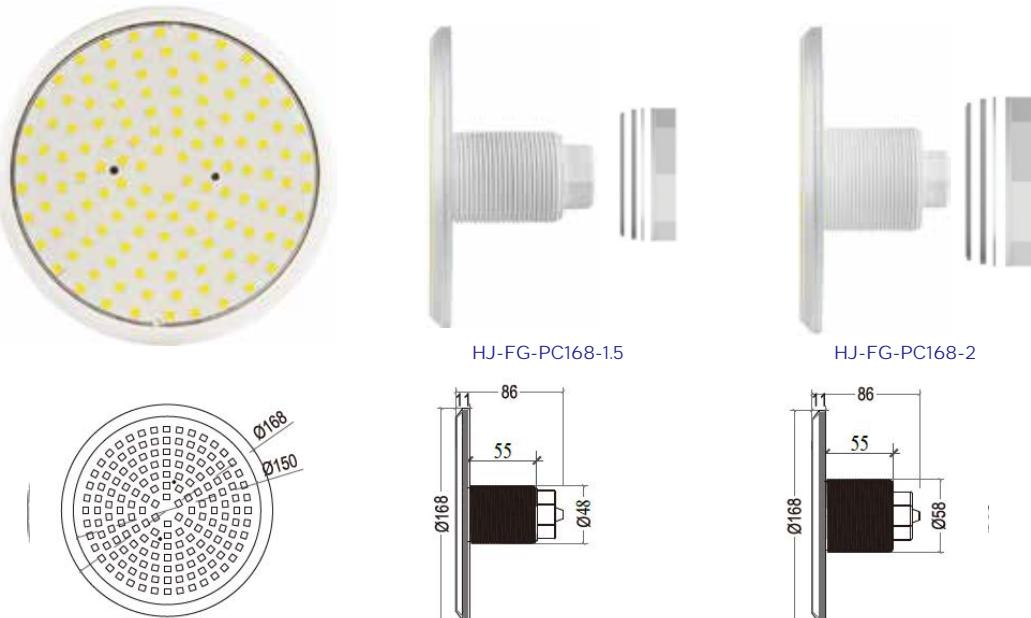

| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|----------------------------------|-----------|--------------------|--------|--------|--------|--|--|
| HJ-FG-PC168-1.5 HJ-FG-PC168-2 | 9W 18W | 12V/24V (AC/DC) | ✓ ✓ | ✓ ✓ | X ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V | Waterproof Rating : IP 68 Resin filled Body Material : ABS+UV Beam Angle : 120° Lens Material : PC |
| | | | | | | | |

Model : HJ-FG-SS220-2/HJ-FG-PC220-2


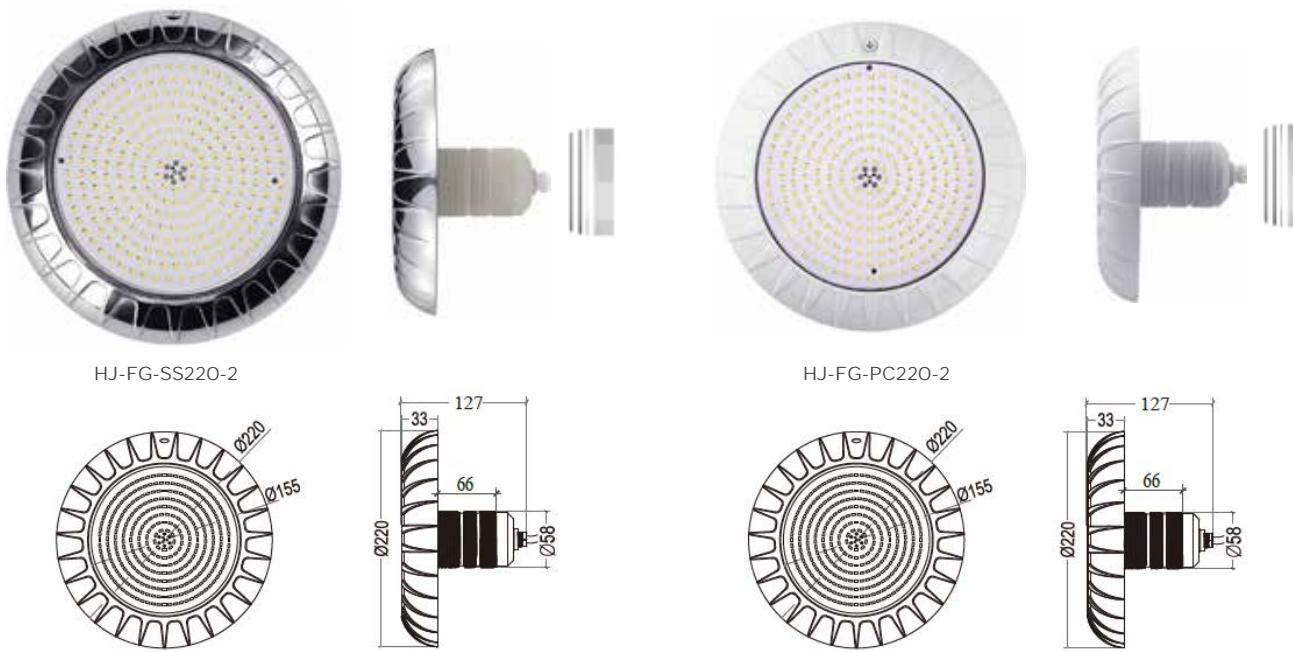


| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|--------------------------------|-------------------|--------------------|-------------|-------------|-------------|--|---|--|
| HJ-FG-SS220-2 HJ-FG-PC220-2 | 12W 18W 25W | 12V/24V (AC/DC) | ✓ ✓ ✓ | ✓ ✓ X | ✓ ✓ X | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V | Waterproof Rating : IP 68 Resin filled Body Material : SS304/316L Lens Material : PC Waterproof Craft : Resin filled Beam Angle : 120° | Body Material : SS304/316L Body Material : ABS+UV |
| | | | | | | | | |



Model : HJ-FG-SS260-1.5 HJ-FG-PC260-1.5
HJ-FG-SS260-2 HJ-FG-PC260-2

| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|--|-------------------|--------------------|-------------|-------------|-------------|--|---|--|
| HJ-FG-SS260-1.5 HJ-FG-SS260-2 HJ-FG-PC260-1.5 HJ-FG-PC260-2 | 12W 18W 25W | 12V/24V (AC/DC) | ✓ ✓ ✓ | ✓ ✓ X | ✓ ✓ X | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V | Waterproof Rating : IP 68 Resin filled Body Material : SS304/316L Lens Material : PC Waterproof Craft : Resin filled Beam Angle : 120° | Body Material : SS304/316L Body Material : ABS+UV |
| | | | | | | | | |

Installation for Fiberglass Pool


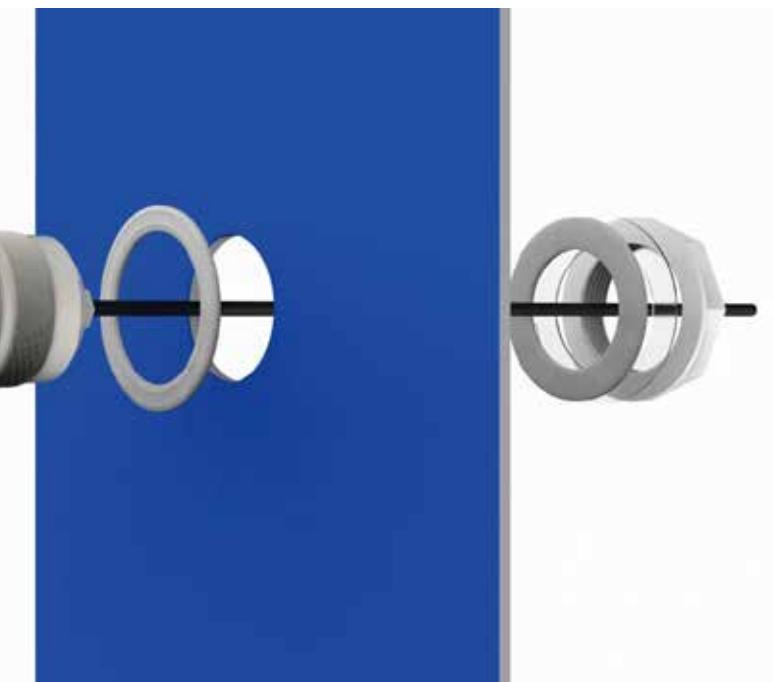


Model : HJ-PE-SS62/HJ-PE-PC62

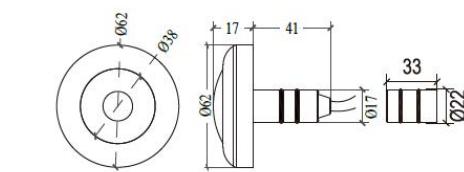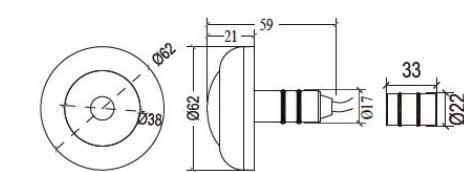

| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|------------|-------------------|---------|--------|--------|--------|---------------------|--|----------------------------|
| HJ-PE-SS62 | 6W 12W (DC) | 12V | ✓ ✓ | ✓ ✓ | ✓ X | HJ-0050 HJ-0-10V | Waterproof Rating : IP 68 Lens Material : PC Beam Angle : 120° | Body Material : SS304/316L |
| HJ-PE-PC62 | 5W | | ✓ ✓ | ✓ ✓ | ✓ ✓ | | Body Material : ABS+UV | |

Model : HJ-PE-SS95/HJ-PE-PC95

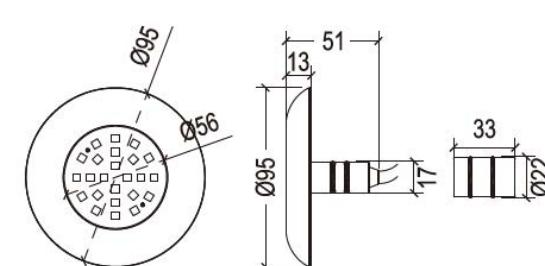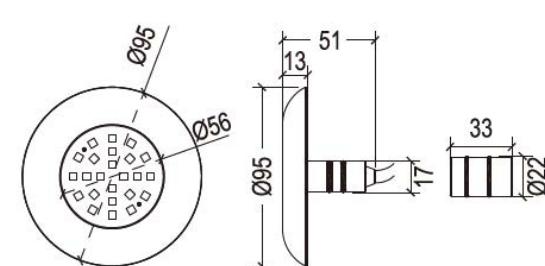


| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|------------|------------|---------|--------|--------|--------|---------------------|---|----------------------------|
| HJ-PE-SS95 | 6W (DC) | 12V | ✓ ✓ | ✓ X | ✓ ✓ | HJ-0050 HJ-0-10V | Waterproof Rating : IP 68 Lens Material : PC | Body Material : SS304/316L |
| HJ-PE-PC95 | | | | | | | Body Material : ABS+UV | |

Model : HJ-PE-PC94/HJ-PE-PC125/HJ-PE-SS105



| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters | Product Features |
|-------------|------------|---------|--------|--------|--------|---------------------|---|---|
| HJ-PE-PC94 | 5W | 12V | ✓ | ✓ | X | HJ-0050 HJ-0-10V | Waterproof Rating : IP 68 Beam Angle : 120° Waterproof Craft : Resin filled | Lens Material : PC Body Material : ABS+UV |
| HJ-PE-PC125 | 9W (DC) | | ✓ ✓ | ✓ X | ✓ ✓ | | Body Material : ABS+UV | |
| HJ-PE-SS105 | 9W | | ✓ ✓ | ✓ ✓ | ✓ X | | Body Material : SS304/316L | |

1)Fiberglass——PEO2

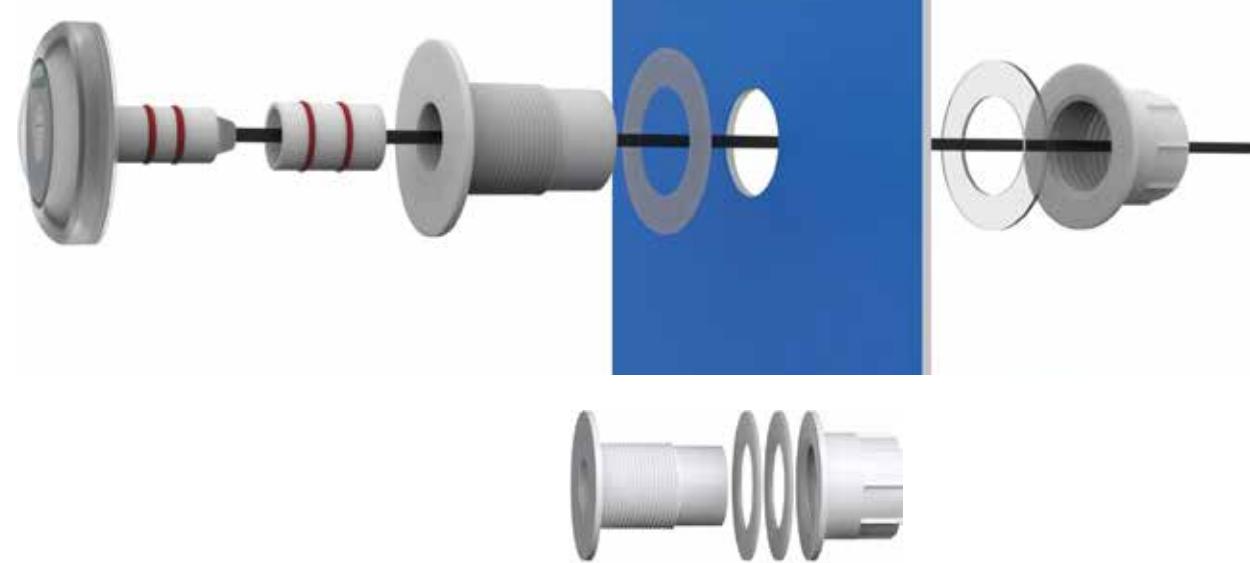


Model : HJ-PAR56-01/HJ-PAR56R-02



| Model | Power | Voltage | CW/W W | RGB W | Controller | Basic Parameters | Product Features |
|----------------------------|-------|--------------------|-----------|----------|------------|--|--|
| HJ-PAR56-01 HJ-PAR56-02 | 12W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V | Waterproof Rating: IP 68 Body Material: ABS+UV Lens Material: PC Waterproof Craft: Resin filled |
| | 18W | | ✓ | ✓ | X | | |
| | 25W | | ✓ | ✓ | X | | |
| | 95W | | ✓ | ✓ | X | | |
| Beam Angle: 120° | | | | | | | |

Model : HJ-PAR56-04/HJ-PAR56-05

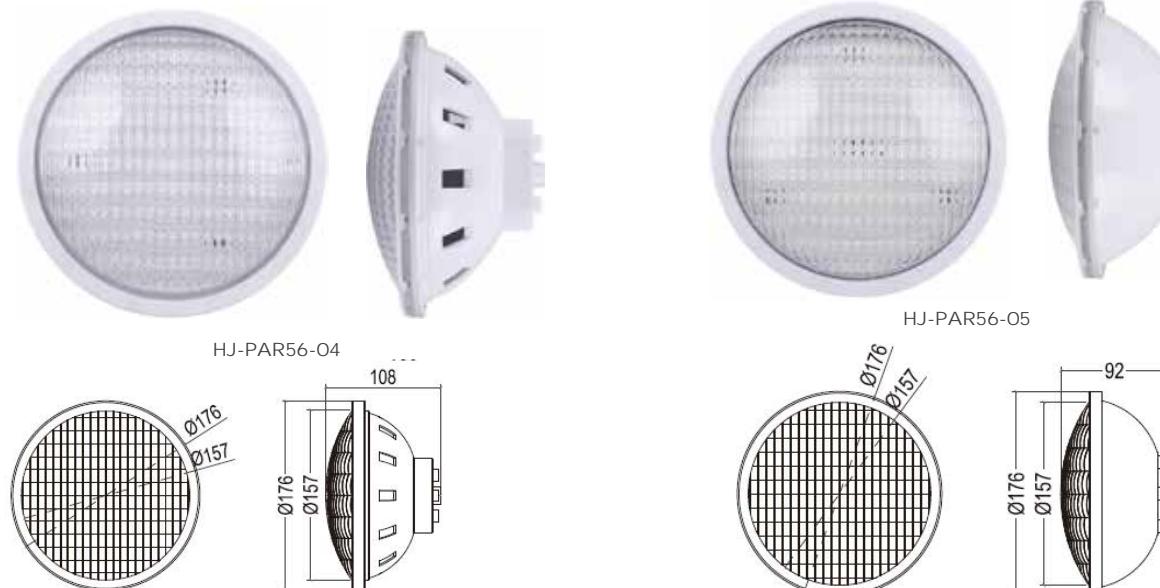


| Model | Power | Voltage | CW/W W | RGB W | Controller | Basic Parameters | Product Features |
|------------------|-------|--------------------|-----------|----------|------------|--|--|
| HJ-PAR56-04 | 18W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V | Waterproof Rating: IP 68 Body Material: ABS+UV Lens Material: PC |
| | 25W | | ✓ | ✓ | ✓ | | |
| | 35W | | ✓ | ✓ | X | | |
| | 50W | | ✓ | X | X | | |
| HJ-PAR56-05 | 12W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | | |
| | 18W | | ✓ | ✓ | X | | |
| | 25W | | ✓ | ✓ | X | | |
| Beam Angle: 120° | | | | | | | |

Model : HJ-PAR56-06/HJ-PAR56-07



| Model | Power | Voltage | CW/W W | RGB W | Controller | Basic Parameters | Product Features |
|-------------|-------|--------------------|-----------|----------|------------|--|--|
| HJ-PAR56-06 | 18W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V | Waterproof Rating: IP 68 Body Material: SS304/316L Lens Material: PC |
| | 25W | | ✓ | ✓ | X | | |
| | 35W | | | | | | |
| HJ-PAR56-07 | 20W | | ✓ | ✓ | X | / | Beam Angle: 120° |
| | 30W | | ✓ | ✓ | X | | |

Model : E27-80

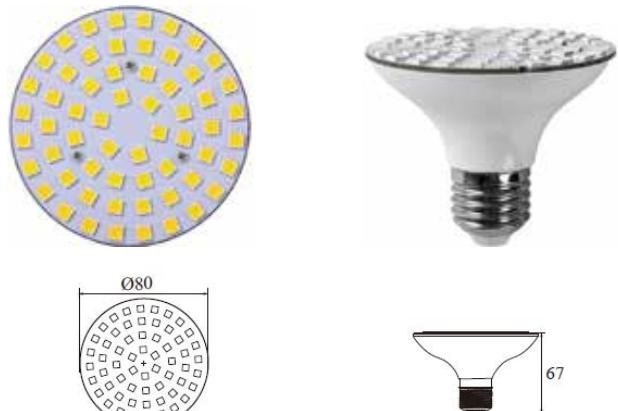

| Model | Power | Voltage | CW/W W | RGB W | Controller | Basic Parameters | Product Features |
|--------|-------|----------------|-----------|----------|------------|---|--|
| E27-80 | 9W | 12V (AC/DC) | ✓ | ✓ | X | HJ-0020 HJ-0040/HJ-0041 HJ-0010 HJ-0-10V | Waterproof Rating: IP 68 Body Material: PC Base type:E27 |


HJ-RC-PC290 Assembly




Model : HJ-SL75/HJ-SL100



HJ-SL75

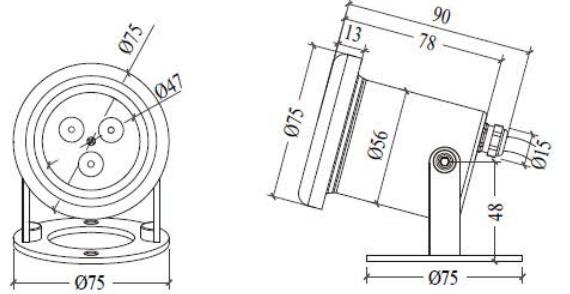

HJ-SL100

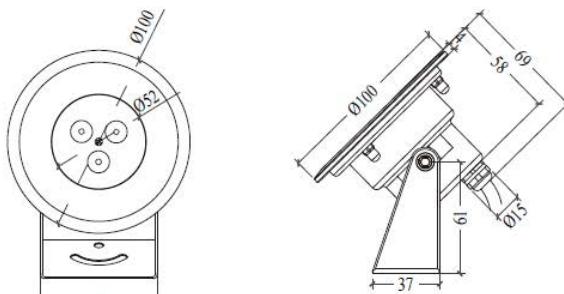


| Model | Power | Voltage | CW/WW | RGB | RGB W | Controller | Basic Parameters |
|----------|-----------|--------------------|--------|--------|--------|--|--|
| HJ-SL75 | 6W 12W | 12V/24V (AC/DC) | ✓ ✓ | ✓ ✓ | ✓ X | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-O-10V | Waterproof Rating : IP 68 Body Material : SS304/316L Lens Material : Tempered glass Beam Angle : 15°30°45°60° |
| HJ-SL100 | 3W | | ✓ | ✓ | ✓ | DMX512 | |


Model : HJ-SL150/HJ-SL180



HJ-SL150

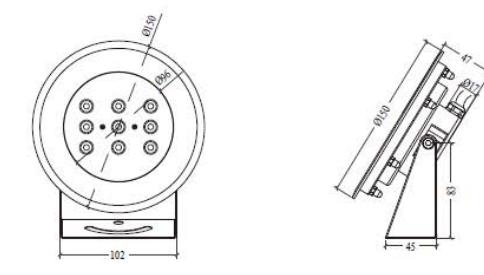

HJ-SL180




| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|----------|------------------|--------------------|-------------|-------------|--------|--|--|
| HJ-SL150 | 9W 18W 12W | 12V/24V (AC/DC) | ✓ ✓ ✓ | ✓ ✓ ✓ | ✓ X | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-O-10V | Waterproof Rating : IP 68 Body Material : SS304/316L Lens Material : Tempered glass Beam Angle : 15°30°45°60° |
| HJ-SL180 | 18W 25W | | ✓ | ✓ | ✓ | DMX512 | |


Model : HJ-SL110/HJ-SL148



HJ-SL110

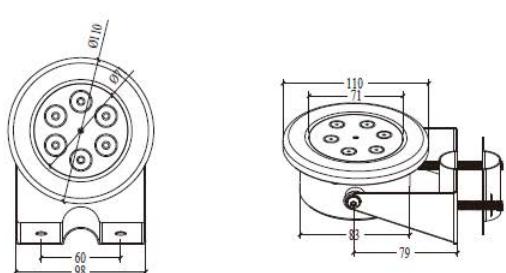


HJ-SL148

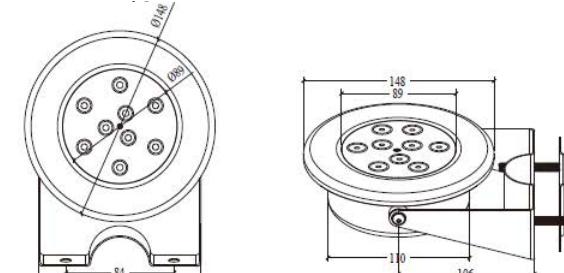

| Model | Power | Voltage | CW/WW | RGB | RGB W | Controller | Basic Parameters |
|----------|------------------|--------------------|-------------|-------------|--------|--|--|
| HJ-SL110 | 6W 12W 18W | 12V/24V (AC/DC) | ✓ ✓ ✓ | ✓ ✓ ✓ | ✓ X | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-O-10V | Waterproof Rating : IP 68 Body Material : SS304/316L Lens Material : Tempered glass Beam Angle : 15°30°45°60° |
| HJ-SL148 | 9W 18W 25W | | ✓ ✓ ✓ | ✓ ✓ ✓ | X | DMX512 | |

Model : HJ-SL192


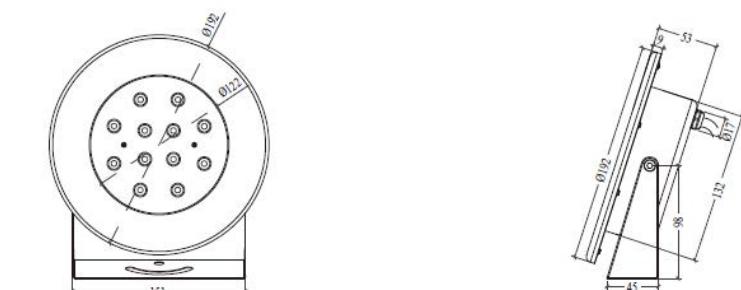


| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|----------|------------|--------------------|--------|--------|--------|---|--|
| HJ-SL192 | 18W 25W | 12V/24V (AC/DC) | ✓ ✓ | ✓ ✓ | ✓ X | HJ-0020 HJ-0040/HJ-004 HJ-0050 HJ-0010 HJ-O-10V DMX512 | Lens Material : Tempered glass Beam Angle : 15°30°45°60° Waterproof Rating : IP 68 Body Material : SS304/316L |



Model : HJ-FL158-32/HJ-FL170-32



HJ-FL158-32




HJ-FL170-32





Model : HJ-FL280-65/HJ-FL220-32-2



HJ-FL280-65



HJ-FL220-32-2





| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|-------------|-----------------------|---------|-------------|-------------|-------------|--|--|
| HJ-FL158-32 | 12W 18W (AC/DC) | 12V/24V | ✓ ✓ ✓ | ✓ ✓ X | ✓ ✓ ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V DMX512 | Waterproof Rating : IP 68 Body Material : SS304/316L Lens Material : Tempered glass Beam Angle : 15°30°45°60° |
| HJ-FL170-32 | 9W | | ✓ ✓ | ✓ ✓ | ✓ | | |

| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|---------------|-----------------------|---------|-------------|-------------|-------------|--|--|
| HJ-FL280-65 | 18W 24W (AC/DC) | 12V/24V | ✓ ✓ ✓ | ✓ ✓ X | ✓ ✓ ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V DMX512 | Waterproof Rating : IP 68 Body Material : SS304/316L Lens Material : Tempered glass Beam Angle : 15°30°45°60° |
| HJ-FL220-32-2 | 9W | | ✓ ✓ | ✓ ✓ | ✓ | | |



Model : HJ-FL192-50/HJ-FL220-50






HJ-FL192-50



HJ-FL220-50



Model : HJ-FL158-1/HJ-FL192-2

HJ-FL158-1
(Threaded)

| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|-------------|-----------------------------|---------|-------------|-------------|-------------|--|--|
| HJ-FL192-50 | 9W 18W 30W (AC/DC) | 12V/24V | ✓ ✓ ✓ | ✓ ✓ X | ✓ ✓ X | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V DMX512 | Waterproof Rating : IP 68 Body Material : SS304/316L Lens Material : Tempered glass Beam Angle : 15°30°45°60° |
| HJ-FL220-50 | 12W 18W | | ✓ ✓ | ✓ ✓ | ✓ | | |

| Model | Power | Voltage | CW/WW | RGB | RGBW | Controller | Basic Parameters |
|------------|------------------------------|---------|-------------|-------------|-------------|--|--|
| HJ-FL158-1 | 12W 18W 12W (AC/DC) | 12V/24V | ✓ ✓ ✓ | ✓ ✓ X | ✓ ✓ ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V DMX512 | Waterproof Rating : IP 68 Body Material : SS304/316L Lens Material : Tempered glass Beam Angle : 15°30°45°60° |
| HJ-FL192-2 | 18W 30W | | ✓ ✓ | ✓ ✓ | ✓ | | |



Model : HJ-UG-SS100/HJ-UG-SS150



HJ-UG-SS100




HJ-UG-SS150

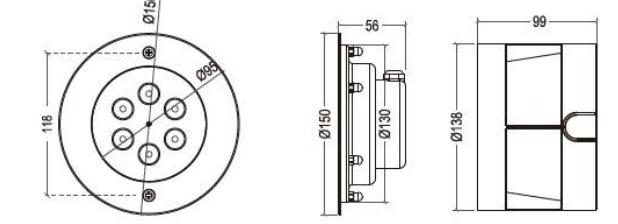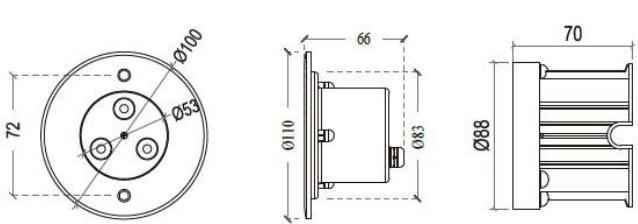

| Model | Power | Voltage | CW/W | RGB | RGB W | Controller | Basic Parameters | Product Features |
|----------------------------|----------|--------------------|------|-----|-------|--|---|--|
| HJ-RC-SS100 HJ-RV-SS150 | 3W 5W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V DMX512 | Waterproof Rating: IP 68 Body Material: SS304 Lens Material: Tempered glass | Application: Concrete pool Beam Angle: 15° 30° 45° 60° |
| | | | ✓ | ✓ | ✓ | | | |

Model : HJ-UG-SS180

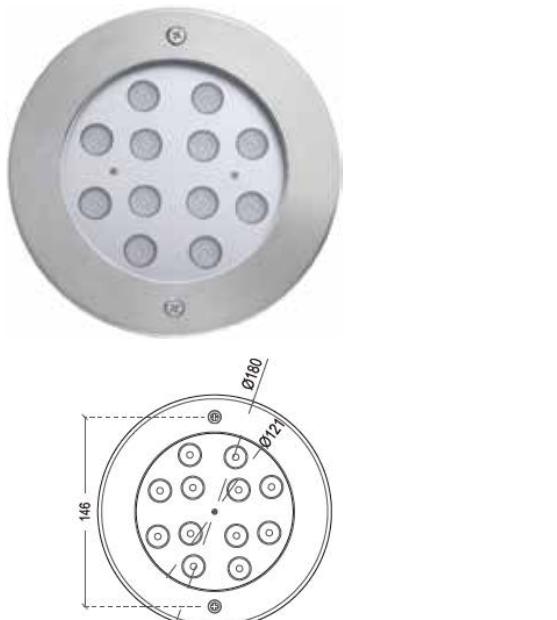


| Model | Power | Voltage | CW/W | RGB | RGB W | Controller | Basic Parameters | Product Features |
|-------------|-------|--------------------|------|-----|-------|--|---|--|
| HJ-UG-SS180 | 12W | 12V/24V (AC/DC) | ✓ | ✓ | ✓ | HJ-0020 HJ-0040/HJ-0041 HJ-0050 HJ-0010 HJ-0-10V DMX512 | Waterproof Rating: IP 68 Body Material: SS304 Lens Material: Tempered glass | Application: Concrete pool Beam Angle: 15° 30° 45° 60° |

RESIN FILLED ISOLATION TRANSFORMER

| Power | Dimension(L*W*H) | Weight | Basic Parameters |
|-------|------------------|---------|------------------|
| 60W | 21.1*6.8*7.4cm | 0.249kg | |
| 100W | 23*8.2*7.5cm | 1.978kg | |
| 200W | 24.5*8.9*10cm | 3.690kg | |
| 300W | 24.5*8.9*10cm | 3.870kg | |
| 500W | 25.2*10.2*14.4cm | 8.641kg | |

Input Voltage:220-230V Output Voltage:AC 12V/24V

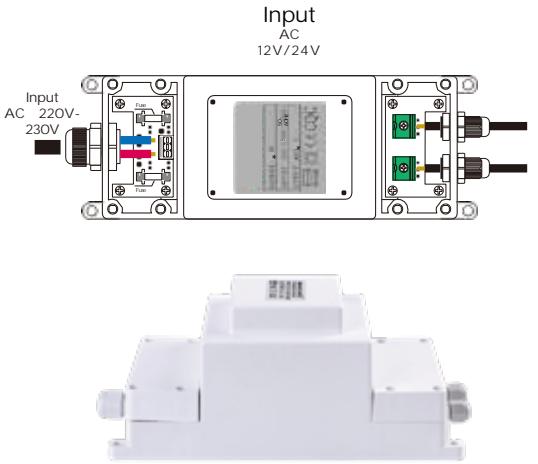

FULL RESIN FILLED ISOLATION TRANSFORMER

| Power | Dimension(L*W*H) | Basic Parameters |
|-------|------------------|------------------|
| 30W | 13.5*5.5*6.5cm | |
| 60W | 14.5*6.5*7.5cm | |
| 100W | 17.1*7.7*7cm | |
| 200W | 19.8*9*10.5cm | |
| 300W | 19.8*9*10.5cm | |
| 500W | 21*11*15cm | |

Input Voltage:220-230V Output Voltage:AC 12V/24V



FULL RESIN FILLED ISOLATION TRANSFORMER

| Power | Dimension(L*W*H) | Basic Parameters |
|-------|------------------|------------------|
| 105W | | |
| 200W | 19.8*14.3*7.8cm | |
| 300W | | |
| 500W | 22.1*16.8*8.7cm | |

Input Voltage:220-230V Output Voltage:AC 12V/24V



WATERPROOF RESIN FILLED POWER SUPPLY /POWER SUPPLY

| Power | Dimension(L*W*H) | Weight (Gross weight) | Basic Parameters |
|-------|------------------|-----------------------|------------------|
| 60W | 15.3*4.5*2.1cm | 0.240kg | |
| 100W | 22.4*5.3*2.1cm | 0.436kg | |
| 200W | 24.5*7.7*4cm | 1.200kg | |
| 300W | 28*7.7*4cm | 1.500kg | |
| 500W | 29*12.3*5.7cm | 3.094kg | |

Input Voltage:110-265V Output Voltage:DC 12V/24V

Electrical Plugs
UK 3-PIN PLUG

US 3-PIN PLUG




EU 2-PIN PLUG




Installation Accessories for Underwater Light WM—Wall-Mount


WM01 Fitting for Fiberglass Pool GB1.5" : Ø50

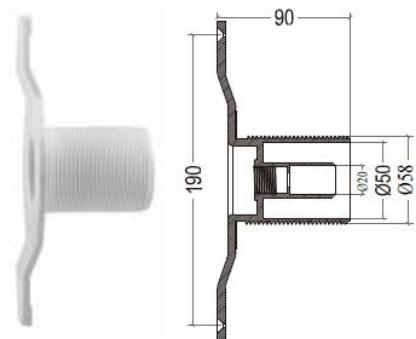

WM03 Fitting for Concrete /Fiberglass/Vinyl Liner Pool GB1.5" : Ø50

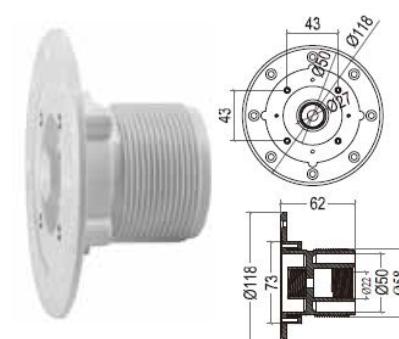


WM05 Lock Wire Connector

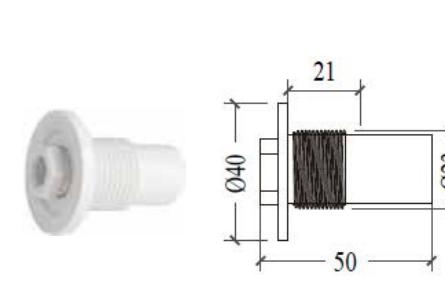


GR—General

GRO1 Return Fitting BS1.5" : Ø48

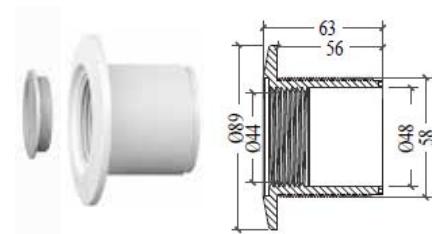


GRO2 Return Fitting GB1.5" : Ø50

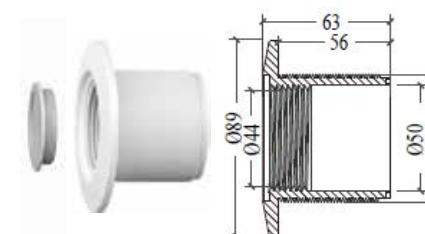


GRO3 Fastener BS1.5" : Ø48



GRO4 Fastener GB1.5" : Ø50

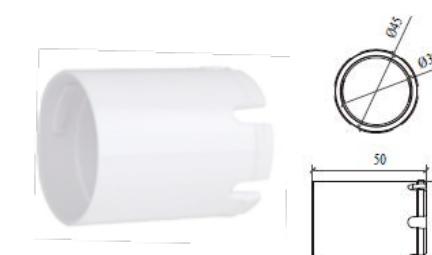


GRO5 Male Thread Fastener

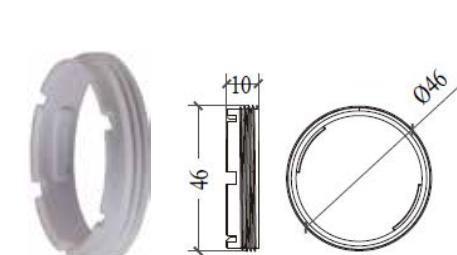


GR48 Niche BS1.5" : Ø48




GR50 Niche GB1.5" : Ø50

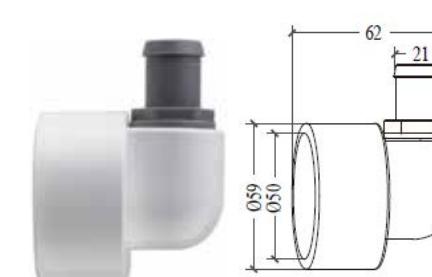

GRO1V Return Fitting for Vinyl Liner Pool BS1.5" : Ø48

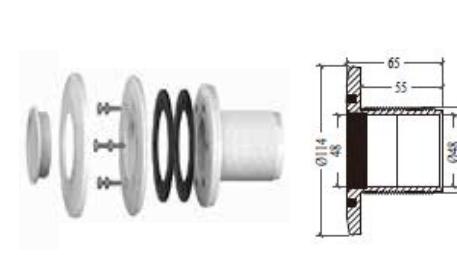


GRO2V Return Fitting for Vinyl Liner Pool GB1.5" : Ø50

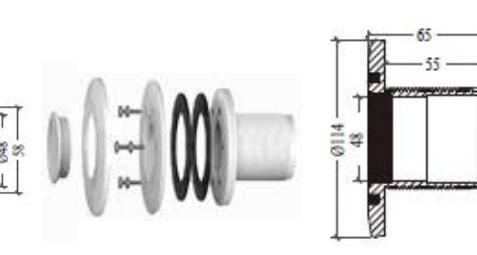


PE—Casing Pipe


PEO1 Adapter Fiberglass Pool

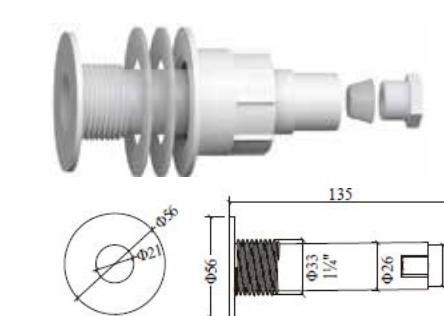

PEO2 Adapter Fiberglass Pool

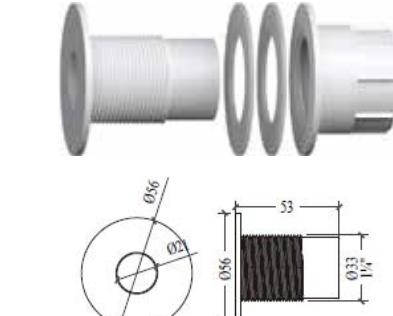


PEO3 Adapter for Concrete Pool

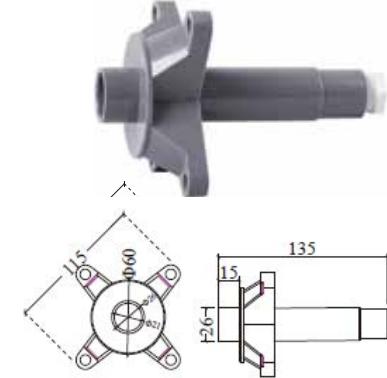


FC—Fiberglass Concrete

FCO2 2" Wall Conduit

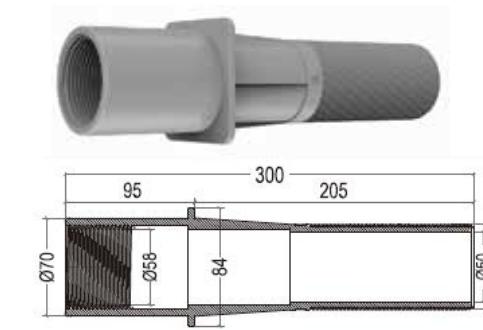


FL—Fountain Light

FLO1 Nozzle 1" DN25
Nozzle Inlet Diameter Ø32mm thread



FLO2 Nozzle 1.5" DN40
Nozzle Inlet Diameter Ø48mm thread



H—Hose

HO1 Hose



HO2 Hose (with clamp)

